

Network Performance: Bandwidth and Latency

Hui Chen

Department of Computer & Information Science

CUNY Brooklyn College

Review

- What to build?
 - Computer Network
 - General purpose
 - Cost-effective network sharing
 - Fair network link allocation
 - Robust connectivity
- How to build?
 - Layered architecture
- *How good is it? Does it meet application needs?*
 - Performance Metrics
 - Application performance needs

Performance Metrics

- Bandwidth
 - Data can be transmitted per time unit
 - Notation
 - Kbps = 10^3 bits per second (bps)
 - Mbps = 10^6 bits per second (bps)
 - Gbps = 10^9 bits per second (bps)
 - *Question: how is memory storage capacity (the amount of data) measured?*
- Latency (delay)
 - Time to send message from point A to point B
 - Components
 - Latency = propagation + transmit + queue + ...
 - Propagation (i.e., propagation delay or propagation time) = distance / speed of signal
 - Transmit (i.e., transmit time) = size / bandwidth
 - queue (i.e., queueing delay) = the time when the message stays in the buffer before it is forwarded.
 - One-way versus round-trip time (RTT)

Link versus End-to-End


- End-to-End bandwidth
 - Throughput
 - All things considered
- Observations
 - Bits move “fast” but nodes may be slow
 - Fiber optics
 - Routing nodes made by “electronic” processors
 - Bandwidth limited by the nodes: optical routing
 - Bits move “slow” but nodes may be fast
 - Plain old telephone line
 - Fast routing nodes
 - Bandwidth limited by the link: replace the link

Latency = Propagation + Transmit + Queue + ...

- Many factors are in play
 - Node
 - Communication channel (link)
 - Interference
 -

Latency = Propagation + Transmit + Queue + ...

- Simple scenario: two nodes connected by a link

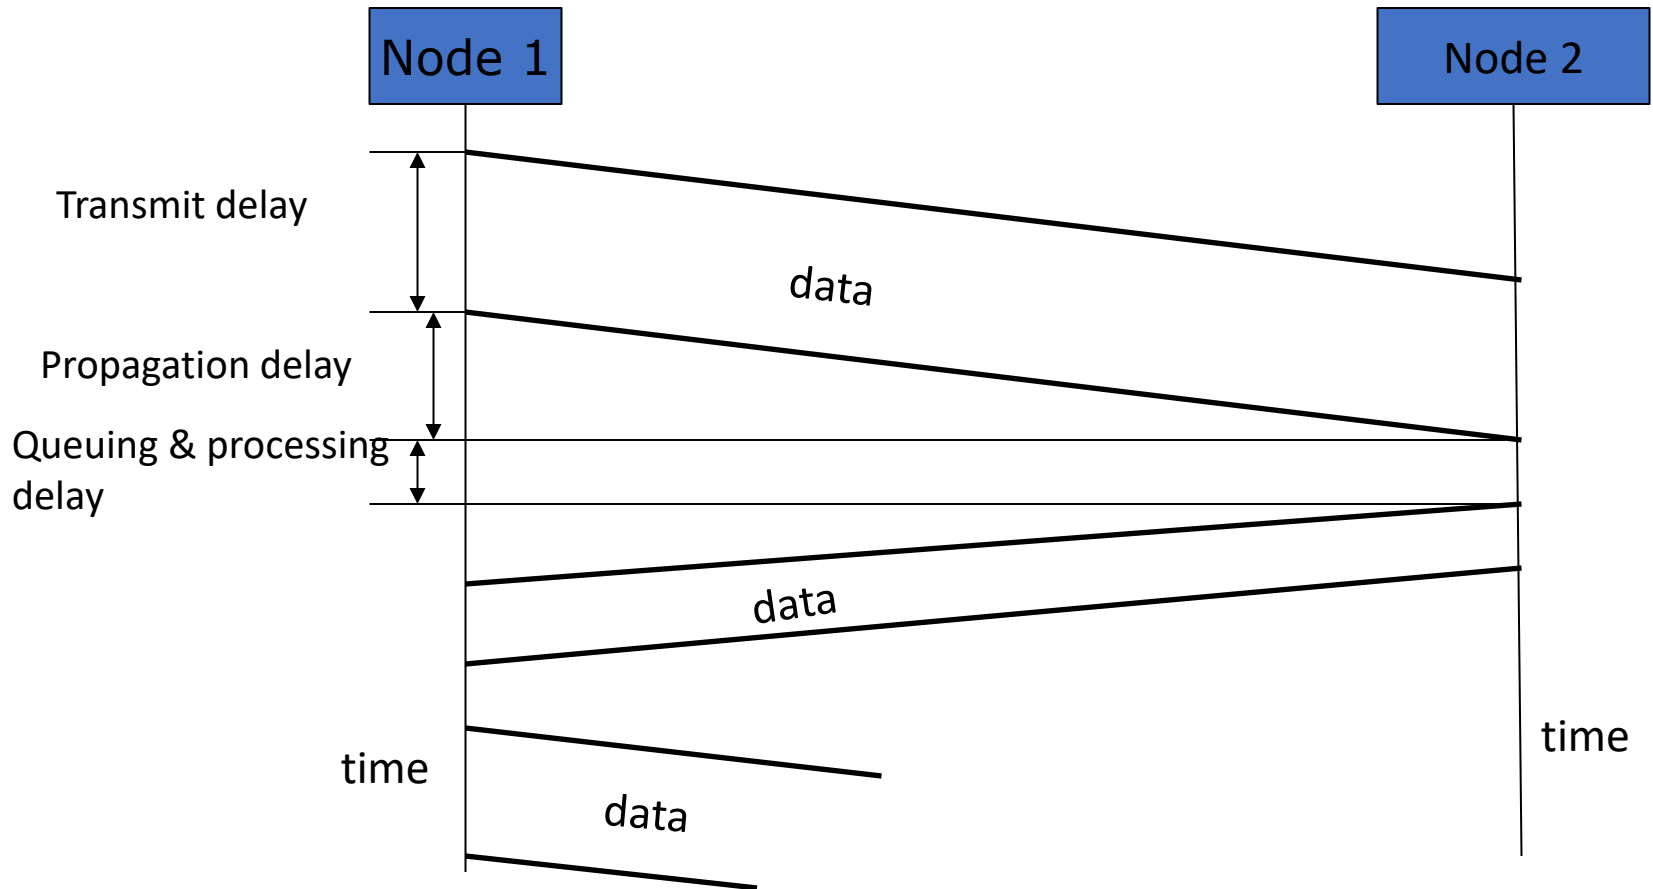


Exercise 1

- Consider a fiber optic link 4400 km in length.
 - How much is the propagation delay of the link?
- Compute the time for transmitting 4 MB of data
 - Transmit data at the bandwidth of 56 kbps
 - Transmit data at the bandwidth of 100 Mbps
 - Transmit data at the bandwidth of 10 Gbps

Bandwidth versus Latency


- Bandwidth and latency
 - $\text{Throughput} = \text{Transfer Size} / \text{Transfer Time}$
- Example
 - Ignore queuing & processing delay. Acknowledgement takes no time.
 - $\text{Transfer Time} = \text{RTT} + \text{Transfer Size} / \text{Bandwidth}$
 - $\text{Throughput} = \text{Transfer Size} / \text{Transfer Time}$
 - Two networks: compute RTT and throughput
 - RTT = 1 ms; bandwidth = 1 Mbps
 - RTT = 100 ms; bandwidth = 100 Mbps
 - Send 1 byte
 - RTT dominates, bandwidth insignificant
 - Send 25 Mbytes
 - Bandwidth dominates, RTT insignificant

Bandwidth & Latency: Relative Importance

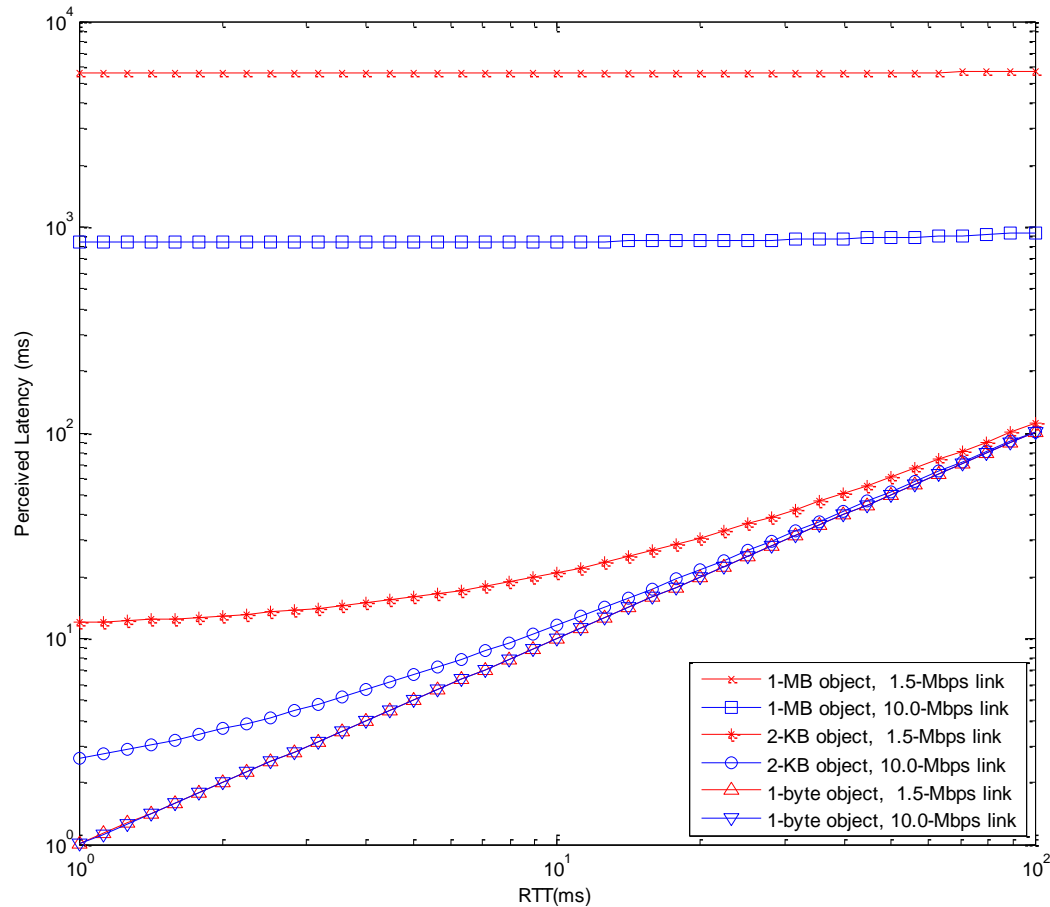


How wide is a bit?

- Consider a link as a pipe full of bits, one after another

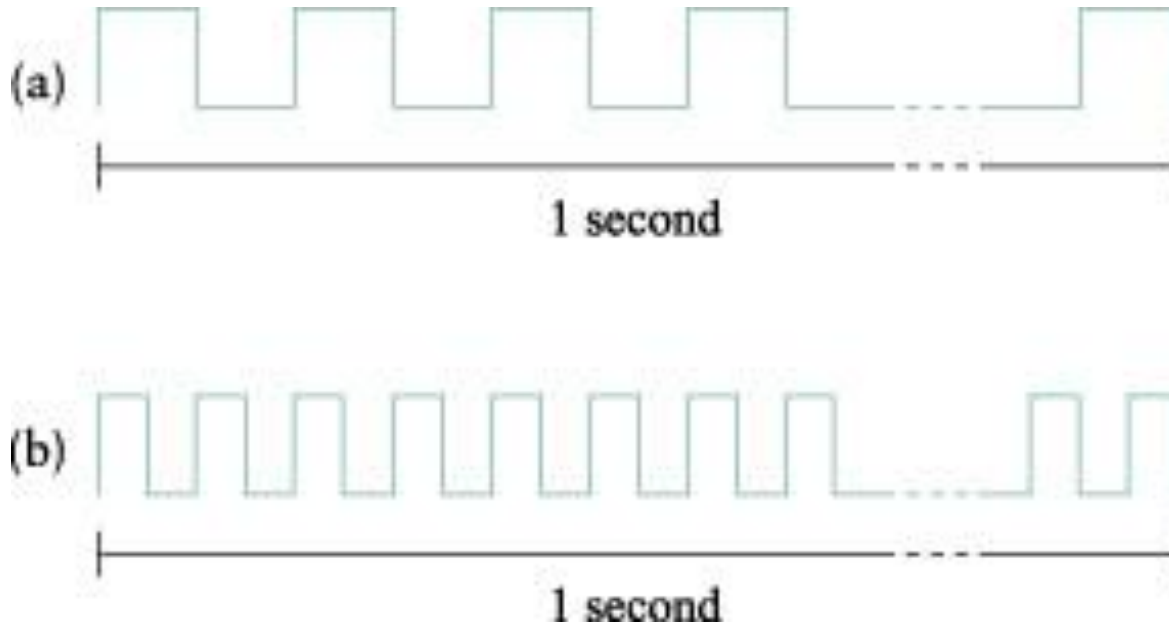

Link Utilization

- Do bits have “width”? How wide is a bit?
- Consider following cases: what do you observe, assume the links are of the same?

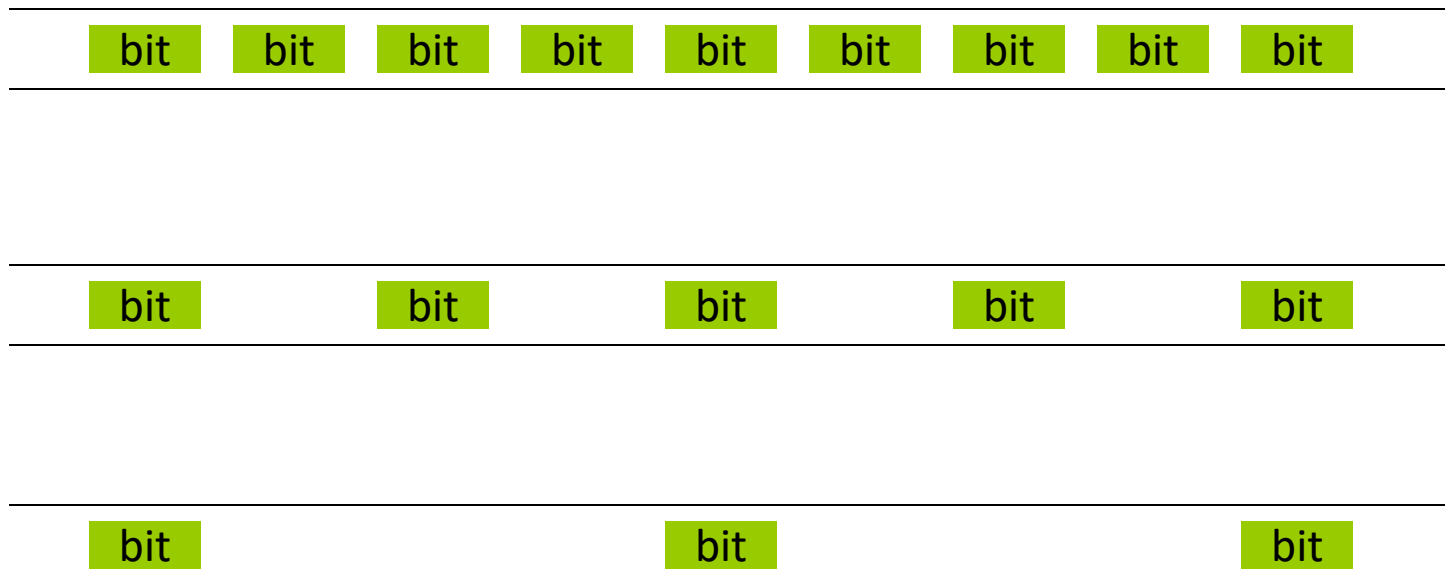

Delay × Bandwidth Product

- Amount of data “in flight” or “in the pipe”
- Example: 100 ms × 45 Mbps = 560 KB

Link Type	Bandwidth (Typical)	Distance (Typical)	Round-trip Delay	Delay × BW
Dial-up	56 Kbps	10 km	87 μ s	5 bits
Wireless LAN	54 Mbps	50 m	0.33 μ s	18 bits
Satellite	45 Mbps	35,000 km	230 ms	10 Mb
Cross-country fiber	10 Gbps	4,000 km	40 ms	400 Mb

Exercise 2

- Show step-by-step how delay \times bandwidth is calculated in previous slide (also included below). Choose one of the four.

Link Type	Bandwidth (Typical)	Distance (Typical)	Round-trip Delay	Delay \times BW
Dial-up	56 Kbps	10 km	87 μ s	5 bits
Wireless LAN	54 Mbps	50 m	0.33 μ s	18 bits
Satellite	45 Mbps	35,000 km	230 ms	10 Mb
Cross-country fiber	10 Gbps	4,000 km	40 ms	400 Mb

- Calculate delay \times bandwidth for the following links
 - A wireless link of 56 kbps between Earth and the moon, provided signal travels at the speed of light (3×10^8 m/s) and the distance between the two is 384,403 km.

Application Performance Needs

- Uncompressed video: sequences of frames
 - $\frac{1}{4}$ NTSC = 352×240 pixels
 - True color: 24 bits for 1 pixel
 - 1 frame = $352 \times 240 \times 24 = 2027520$ bits
 - 30 fps (frames/second)
 - $2027520 \text{ bits/frame} \times 30 \text{ fps} = 60825600 \text{ bits / second} = 60825600 \text{ bps} = 60825.6 \text{ Kbps} = 60.8256 \text{ Mbps}$
- Compressed video: constant rate versus varied rate
 - Average bandwidth requirement suffices?
- Delay and Jitter

Exercise 3

- Assume no compression is done. Calculate the bandwidth necessary for transmitting in real time
 - High-definition video at resolution of 1920 x 1080, 24bits/pixel, 30 frames/seconds

Summary

- Performance metrics
 - Bandwidth
 - Latency
 - Relative importance
 - Delay \times Bandwidth Product
- Application needs
 - Bandwidth requirement
 - Delay requirement