CISC 7310X CO8b Demand Paging

Hui Chen

Department of Computer & Information Science CUNY Brooklyn College

Acknowledgement

 These slides are a revision of the slides provided by the authors of the textbook via the publisher of the textbook

Outline

- Demand Paging
- Copy-on-Write
- Page Replacement
- Allocation of Frames
- Thrashing
- Memory-Mapped Files
- Allocating Kernel Memory
- Other Considerations
- Operating-System Examples

Paging: Pages to Frames?

- Prepaging: bring entire process into memory at load time
- Demand paging: bring a page into memory only when it is needed
 - Less I/O needed, no unnecessary I/O
 - Less memory needed
 - Faster response
 - More users


Demand Paging

- Page is needed \Rightarrow reference to it
 - invalid reference \Rightarrow abort
 - not-in-memory \Rightarrow bring to memory
- Lazy swapper never swaps a page into memory unless page will be needed
 - Swapper that deals with pages is a pager


Valid-Invalid Bit

- With each page table entry a valid-invalid bit is associated
 (v ⇒ in-memory - memory resident, i ⇒ notin-memory)
- Initially valid-invalid bit is set to i on all entries
- During MMU address translation, if valid-invalid bit in page table entry is $\mathbf{i} \Rightarrow$ page fault

Example of a Page Table Snapshot

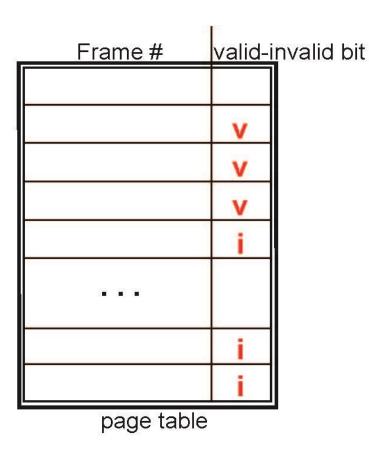

Page Table When Some Pages Are Not in Main Memory

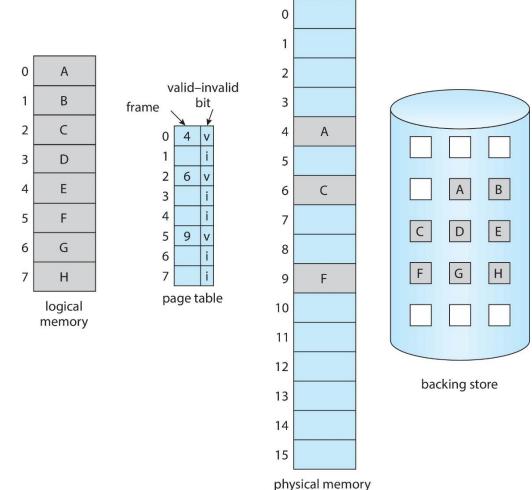

Steps in Handling Page Fault

1. If there is a reference to a page, first reference to that page will trap to operating system

• Page fault

2.Operating system looks at another table to decide:


- Invalid reference \Rightarrow abort
- Just not in memory

3.Find free frame

4. Swap page into frame via scheduled disk operation

5.Reset tables to indicate page now in memory Set validation bit = v

6.Restart the instruction that caused the page fault

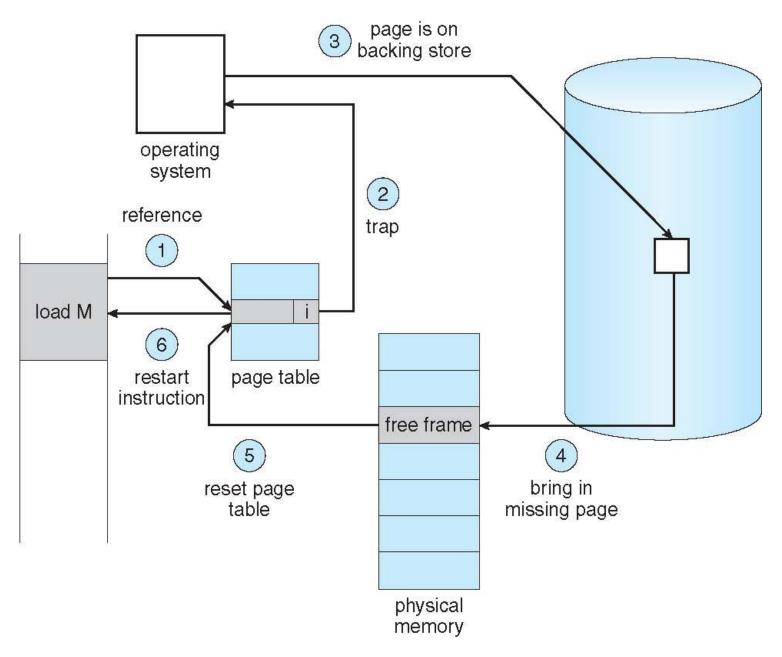


Aspects of Demand Paging

- Extreme case start process with *no* pages in memory
 - OS sets instruction pointer to first instruction of process, non-memory-resident -> page fault
 - And for every other process pages on first access
 - Pure demand paging
- Actually, a given instruction could access multiple pages -> multiple page faults
 - Consider fetch and decode of instruction which adds 2 numbers from memory and stores result back to memory
 - Pain decreased because of locality of reference
- Hardware support needed for demand paging
 - Page table with valid / invalid bit
 - Secondary memory (swap device with swap space)
 - Instruction restart

Instruction Restart

- Consider an instruction that could access several different locations
 - Block move



- Auto increment/decrement location
- Restart the whole operation?
 - What if source and destination overlap?

Free-Frame List

- When a page fault occurs, the operating system must bring the desired page from secondary storage into main memory.
- Most operating systems maintain a free-frame list -- a pool of free frames for satisfying such requests.



- Operating system typically allocate free frames using a technique known as zero-fill-on-demand -- the content of the frames zeroed-out before being allocated.
- When a system starts up, all available memory is placed on the free-frame list.

Stages in Demand Paging – Worse Case

- 1. Trap to the operating system
- 2. Save the user registers and process state
- 3.Determine that the interrupt was a page fault
- 4.Check that the page reference was legal and determine the location of the page on the disk
- 5.Issue a read from the disk to a free frame:
 - 1. Wait in a queue for this device until the read request is serviced
 - 2. Wait for the device seek and/or latency time
 - 3. Begin the transfer of the page to a free frame

Stages in Demand Paging – Worse Case

- 6. While waiting, allocate the CPU to some other user
- 7. Receive an interrupt from the disk I/O subsystem (I/O completed)
- 8. Save the registers and process state for the other user
- 9.Determine that the interrupt was from the disk
- 10.Correct the page table and other tables to show page is now in memory
- 11. Wait for the CPU to be allocated to this process again
- 12.Restore the user registers, process state, and new page table, and then resume the interrupted instruction

Performance of Demand Paging

- Three major activities
 - Service the interrupt careful coding means just several hundred instructions needed
 - Read the page lots of time
 - Restart the process again just a small amount of time
- Page Fault Rate $0 \le p \le 1$
 - if p = 0 no page faults
 - if p = 1, every reference is a fault
- Effective Access Time (EAT)
 - $EAT = (1 p) \times memory access$
 - + p (page fault overhead
 - + swap page out
 - + swap page in)

Example

- Memory access time = 200 nanoseconds
- Average page-fault service time = 8 milliseconds
- EAT = (1 p) x 200 + p (8 milliseconds)
 - = (1 p × 200 + p × 8,000,000
 - = 200 + p x 7,999,800
- If one access out of 1,000 causes a page fault, then
 - EAT = 8.2 microseconds.
 - This is a slowdown by a factor of 40!!
- If want performance degradation < 10 percent
 - 220 > 200 + 7,999,800 × p
 20 > 7,999,800 × p
 - p < .0000025
 - < one page fault in every 400,000 memory accesses

Demand Paging Optimizations

- Swap space I/O faster than file system I/O even if on the same device
 - Swap allocated in larger chunks, less management needed than file system
- Copy entire process image to swap space at process load time
 - Then page in and out of swap space
 - Used in older BSD Unix
- Demand page in from program binary on disk, but discard rather than paging out when freeing frame
 - Used in Solaris and current BSD
 - Still need to write to swap space
 - Pages not associated with a file (like stack and heap) anonymous memory
 - Pages modified in memory but not yet written back to the file system
- Mobile systems
 - Typically don't support swapping
 - Instead, demand page from file system and reclaim read-only pages (such as code)


Questions

- Concepts of prepaging and demand paging
- Analyzing demand paging
- Performance of demand paging


Copy-on-Write

- Copy-on-Write (COW) allows both parent and child processes to initially share the same pages in memory
 - If either process modifies a shared page, only then is the page copied
- COW allows more efficient process creation as only modified pages are copied
- In general, free pages are allocated from a **pool** of **zero-fill-on-demand** pages
 - Pool should always have free frames for fast demand page execution
 - Don't want to have to free a frame as well as other processing on page fault
 - Why zero-out a page before allocating it?
- vfork() variation on fork() system call has parent suspend and child using copyon-write address space of parent
 - Designed to have child call exec()
 - Very efficient

Example: Before Process 1 Modifies Page C

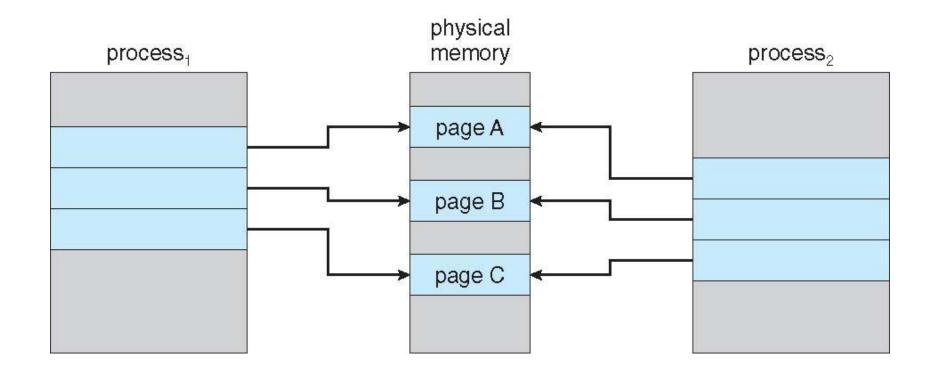

Example: After Process 1 Modifies Page C

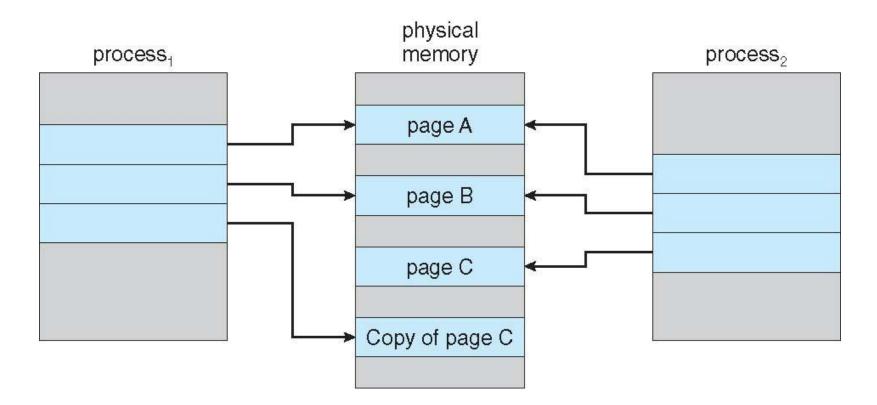

Questions?

• Copy-on-write