

# Packet Switching



Hui Chen, Ph.D.  
Dept. of Engineering & Computer Science  
Virginia State University  
Petersburg, VA 23806

# Acknowledgements

---

- ❑ Some pictures used in this presentation were obtained from the Internet
- ❑ The instructor used the following references
  - Larry L. Peterson and Bruce S. Davie, Computer Networks: A Systems Approach, 5th Edition, Elsevier, 2011
  - Andrew S. Tanenbaum, Computer Networks, 5th Edition, Prentice-Hall, 2010
  - James F. Kurose and Keith W. Ross, Computer Networking: A Top-Down Approach, 5th Ed., Addison Wesley, 2009
  - Larry L. Peterson's (<http://www.cs.princeton.edu/~llp/>) Computer Networks class web site

# Review

---


- ❑ Computer networks
  - General purpose
  - Cost-effective network sharing
  - Fair network link allocation
  - Robust connectivity
- ❑ Direct link networks
  - Smallest network
  - Issues
    - ❑ Encoding
    - ❑ Framing
    - ❑ Error detection and correction
    - ❑ Reliable delivery
    - ❑ Media access control
  - Example
    - ❑ Ethernet
  - **Limitation**
    - ❑ **Size of networks: size of an Ethernet?**

# Lecture Outline

---

- ❑ Scalable networks
  - Switching
    - ❑ Datagram switching
    - ❑ Virtual Circuit
    - ❑ Source routing


# Switches

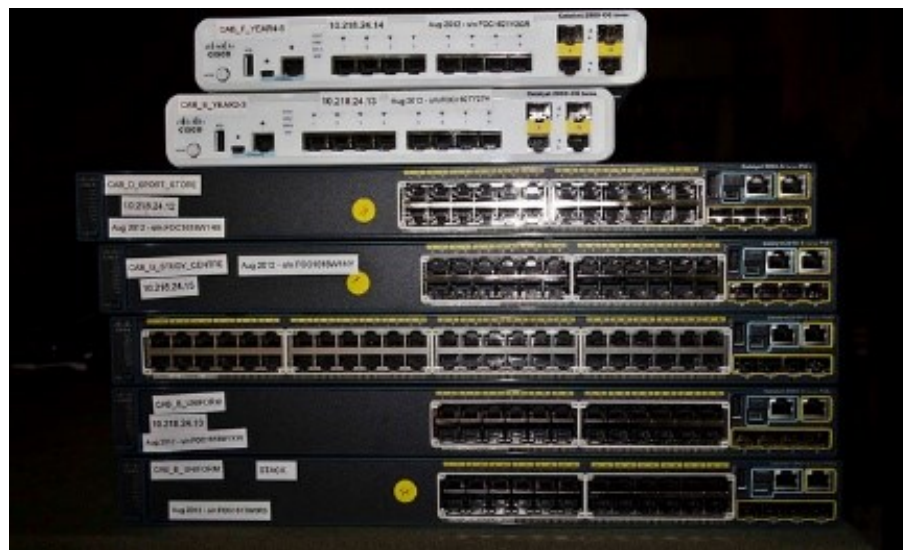

# Switches


---

- ❑ Special node that forwards packets/frames
  - Multiple-input-multiple-output devices
  - Forward packets/frames from input port to output port
  - Switches can connect to each others
  - Each link runs data link protocol (layer 2 switches)
  - Output port selected based on destination address in packet/frame header
  - Provide high aggregate throughput

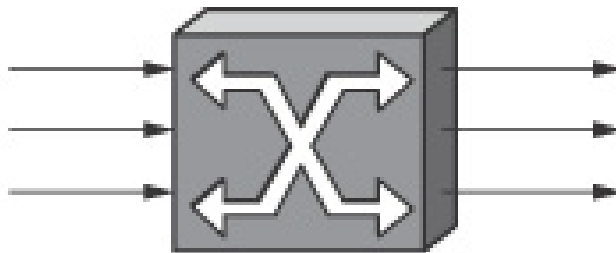

# Switched Networks

---

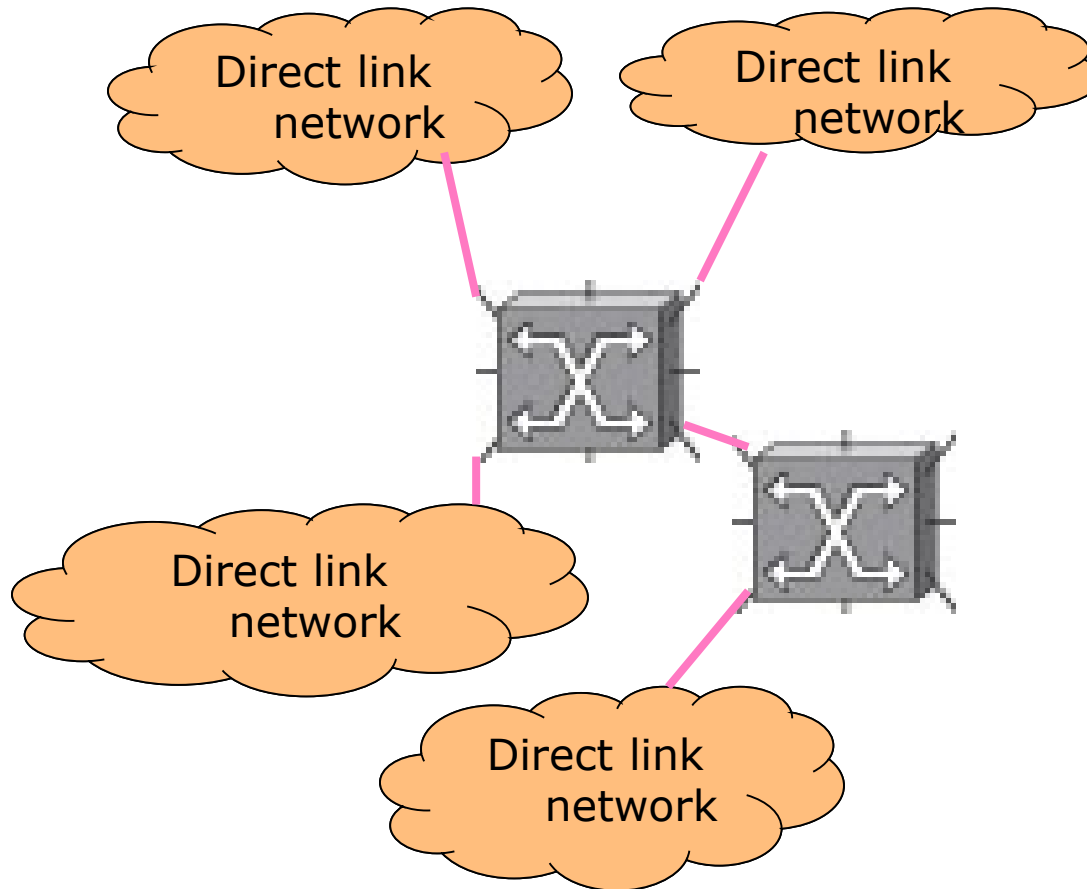

Q: how does a switch decide on which output port to place a frame?

# How does a switch decide on which output port to place a frame?

- ❑ Think about how telephone networks (circuit-switched networks) work
  - How switching (data forwarding) is performed?
    - ❑ A physical circuit is established → someone has to help you.
      - Someone = a real person or a computer
    - ❑ The circuit is dedicated to one connection
    - ❑ Each link can be shared (multiplex) a fixed number of connections (TDM or FDM)



(from <http://www.wchm-tx.org>)



Central office distribution frame

(from <http://www.privateline.com>)

Computer networks are packet switched networks

Data are divided into frames/packets


Still, one has to decide which port to forward a frame/packet



# Packet-switched Networks

---

- ❑ Data are divided and sent using *packets*
  - A packet has a header and trailer which contain control information
- ❑ *Store-and-forward*
  - Each packet is passed from node to node along some path through the network
  - At each node, the entire packet is received, stored briefly, and then forwarded to the next node
- ❑ Statistical multiplexing
  - No capacity is allocated for packets

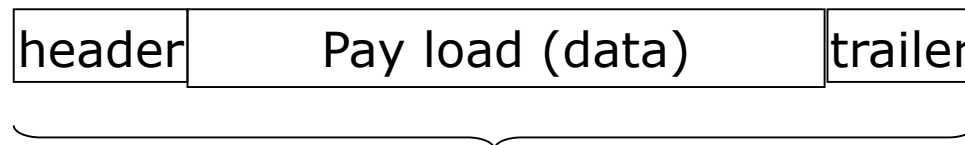

A packet

# Switching Approaches

---


- ❑ Datagram switching
  - Connectionless model
- ❑ Virtual circuit switching
  - Connection-oriented model
- ❑ Source routing
- ❑ Common properties
  - Switches have identifiable ports
  - Hosts/nodes are identifiable

# Datagram Switching

- ❑ Each switch maintains a forwarding table
- ❑ Frame header contains the identifier of destination node
- ❑ Forward packets/frames based on the table
  - Example: if frame header indicates its destination is node B, forward to port 0  
→ done by looking up the table

Forwarding/Routing Table for **Switch 2**


Destination	Port
A	3
B	0
C	3
D	3
E	2
F	1
G	0
H	0

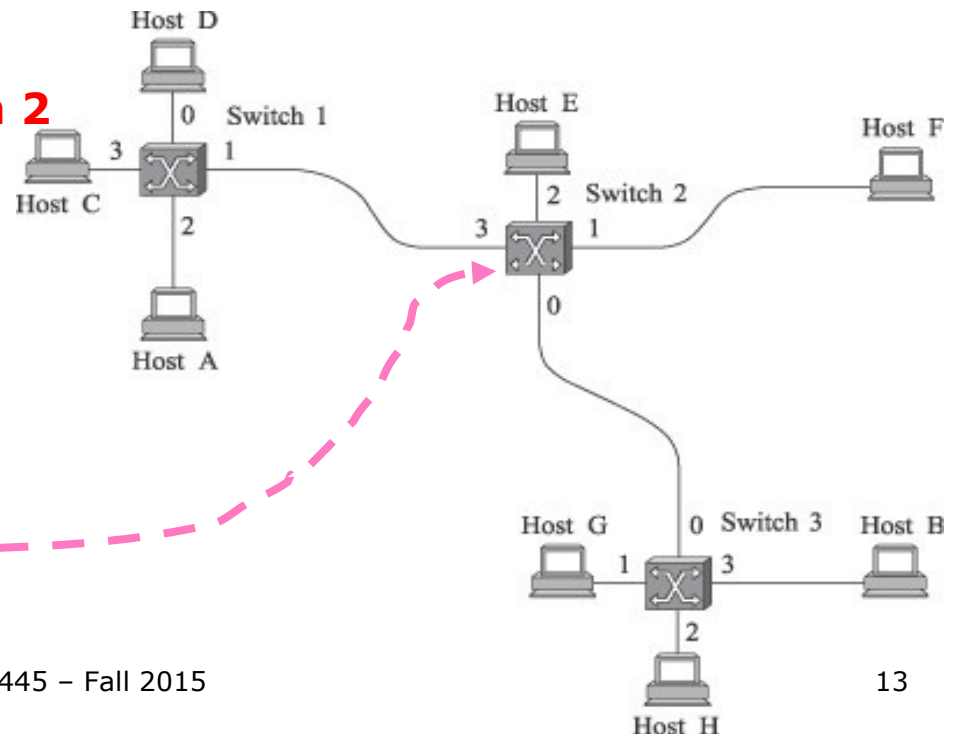

# Exercise L8-1

Forwarding/Routing Table for Switch 2

Destination	Port
A	3
B	0
C	3
D	3
E	2
F	1
G	0
H	0

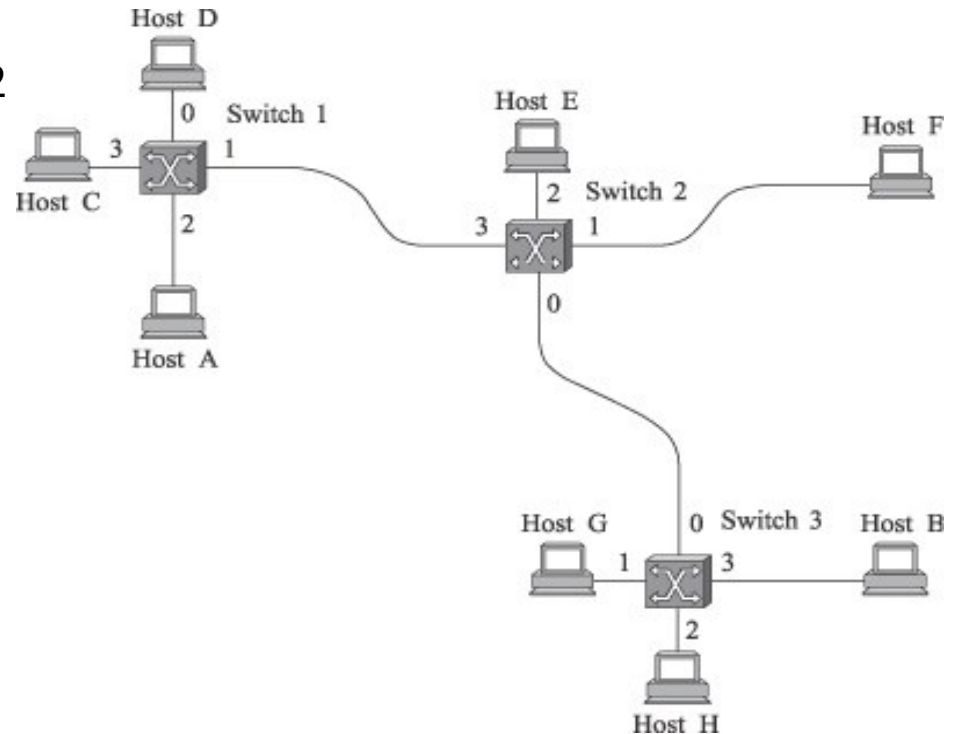

- ❑ Construct the forwarding tables for **other** switches (**switches 1 & 3**)

# Datagram Switching: Discussion

---

- ❑ Each node maintains a forwarding table
- ❑ No connection setup
- ❑ Hosts/switches sends/forwards packets independently
- ❑ Hosts/switches do not know if the network can deliver a packet to its destination
- ❑ A switch/link failure might not be catastrophic
  - Find an alternate route and update forwarding table


# Virtual Circuit Switching

---

- ❑ Connection-oriented model
  - Connection setup → establish “virtual circuit (VC)”
  - Data transfer → subsequent packets follow same circuit
  - Tear down VC
- ❑ Each switch maintains a VC table
  - An entry (row) in VC table must have
    - ❑ VCI: identify connection at this switch **within** a link → a different VCI will be used for outgoing packets
    - ❑ Incoming interface, e.g., a port for receiving packets
    - ❑ Outgoing interface, e.g., a port for forwarding packets
- ❑ Frame header contains VC number (VCI value) of **next link** along a VC

# Virtual Circuit Switching: Example

- Example: host A → host B
  - Switches needed?
    - switches 1, 2, and 3
  - Network do not explicitly maintain global information about virtual circuits

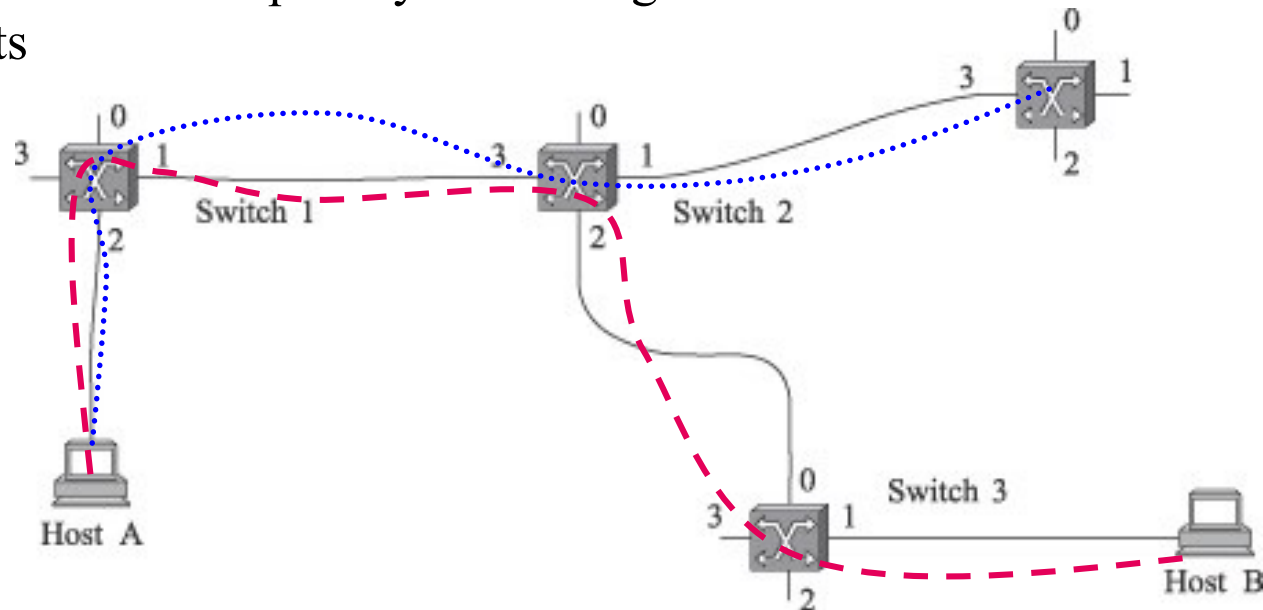


Two planned virtual circuits in red dashed line and blue dotted line

# Virtual Circuit Switching:

## Example: VC Table

- ❑ Setup phase (could be performed manually for a network administrator) → permanent VC → Establish VC table for each switch
- ❑ Example: Switch 1
  - When host A sends out a frame, it places the VCI (i.e. 5) of next link into the frame header
  - Switch 1 looks up an entry based on both incoming interface (i.e., 2) and the VCI (i.e., 5) in the frame header to determine outgoing port (i.e., 1) and VCI (i.e., 11)
  - The scope of VCI values is links
    - ❑ Unused VCI value on the link (Host A to Switch 1)
    - ❑ VCI can be duplicated on different link

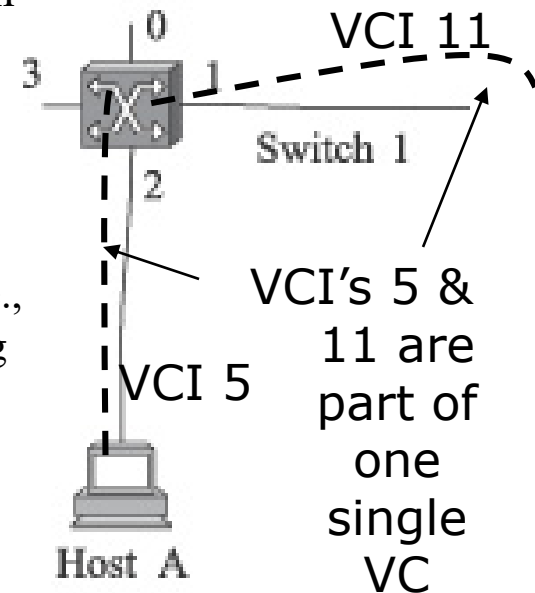

Virtual circuit table entry for **switch 1**

Incoming Interface	Incoming VCI	Outgoing Interface	Outgoing VCI
2	5	1	11



# Virtual Circuit Switching:

## Example: VC Table

Incoming Interface	Incoming VCI	Outgoing Interface	Outgoing VCI
2	5	1	11


Virtual circuit table entry for switch 1

Incoming Interface	Incoming VCI	Outgoing Interface	Outgoing VCI
3	11	2	7

VC table entry at switch 2


Incoming Interface	Incoming VCI	Outgoing Interface	Outgoing VCI
0	7	1	4

VC table entry at switch 3

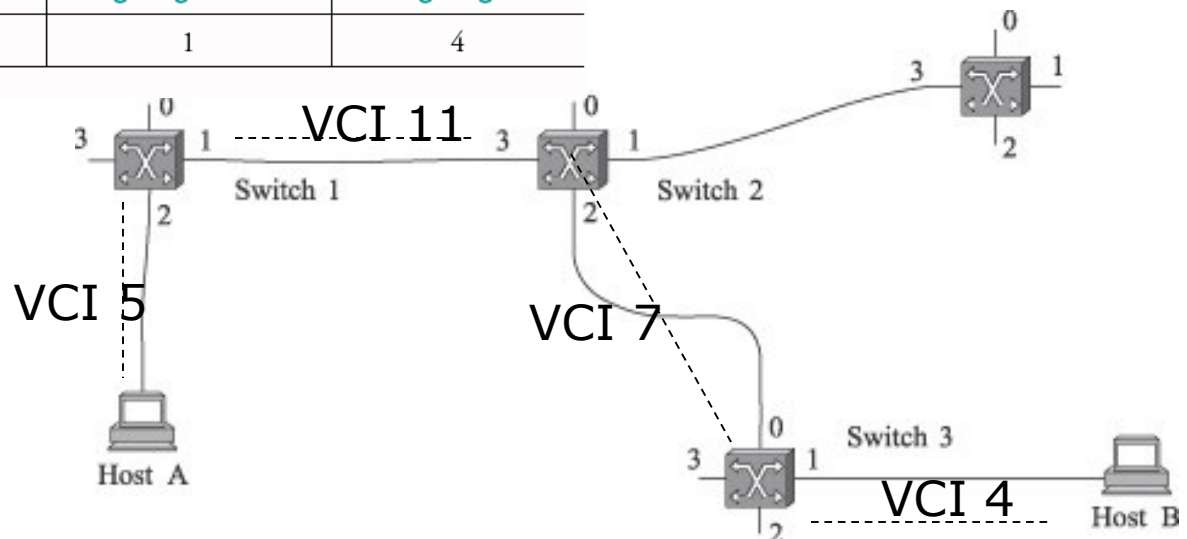


# Virtual Circuit Switching: Example

□ Host A sends a frame to host B

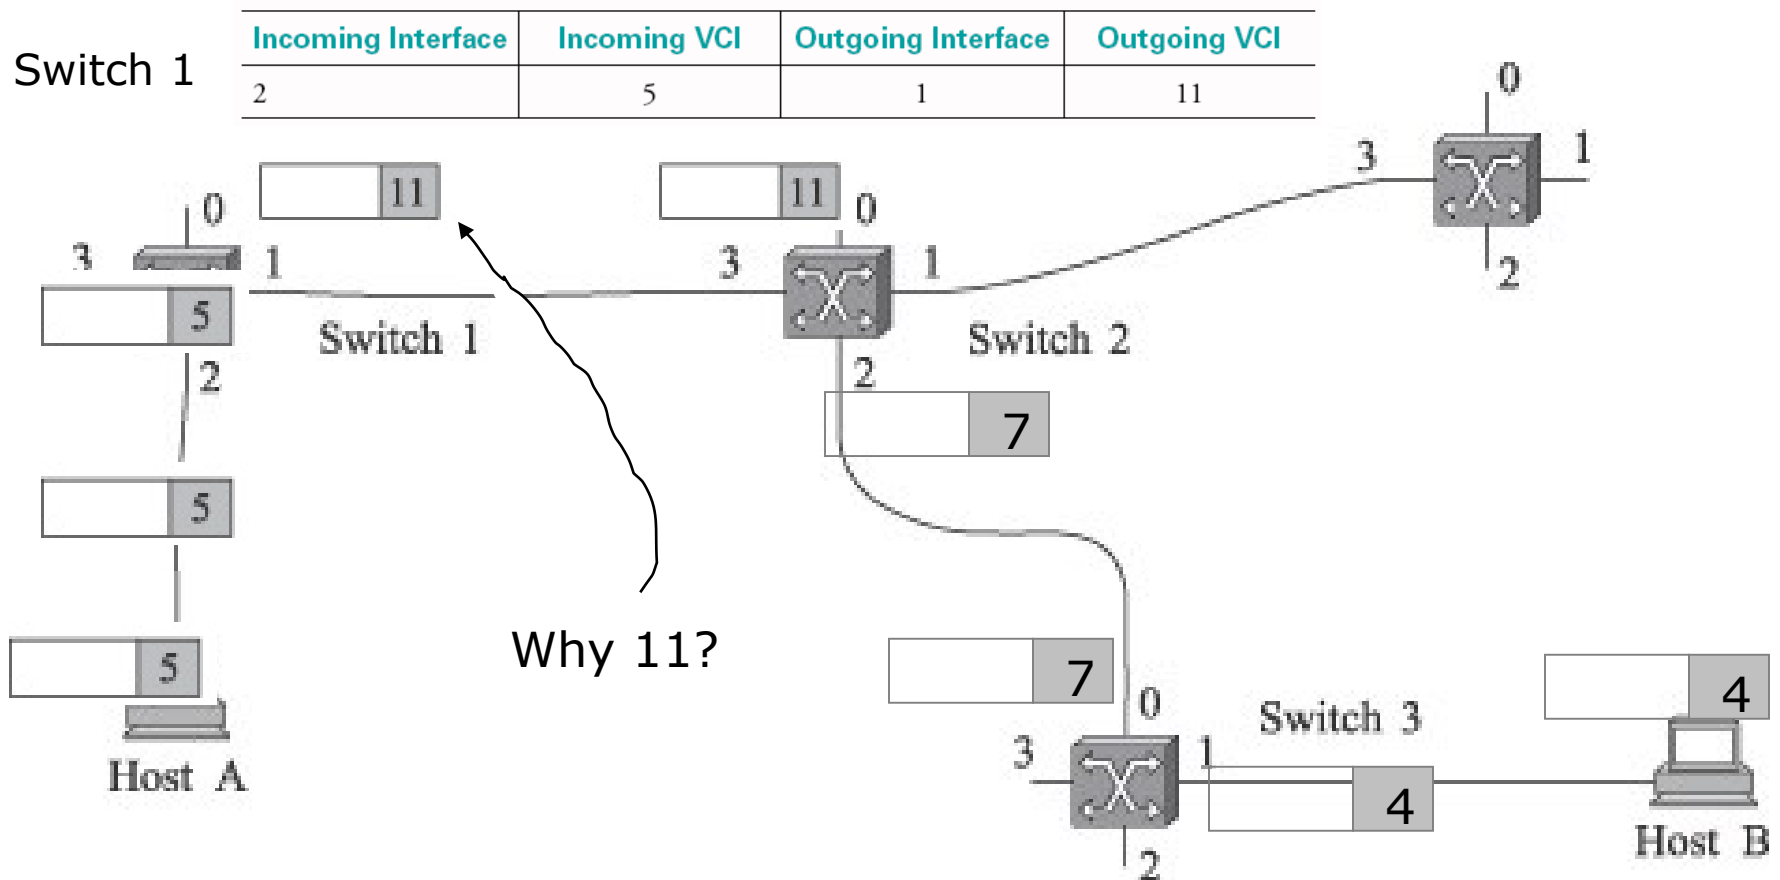

# Exercise L8-2

- ❑ Construct Virtual Circuit (VC) table entry for all the switches on the Virtual Circuit for both red and blue Virtual Circuits
- ❑ List VC tables for switches 1, 2, 3, and 4. You may make necessary assumptions.

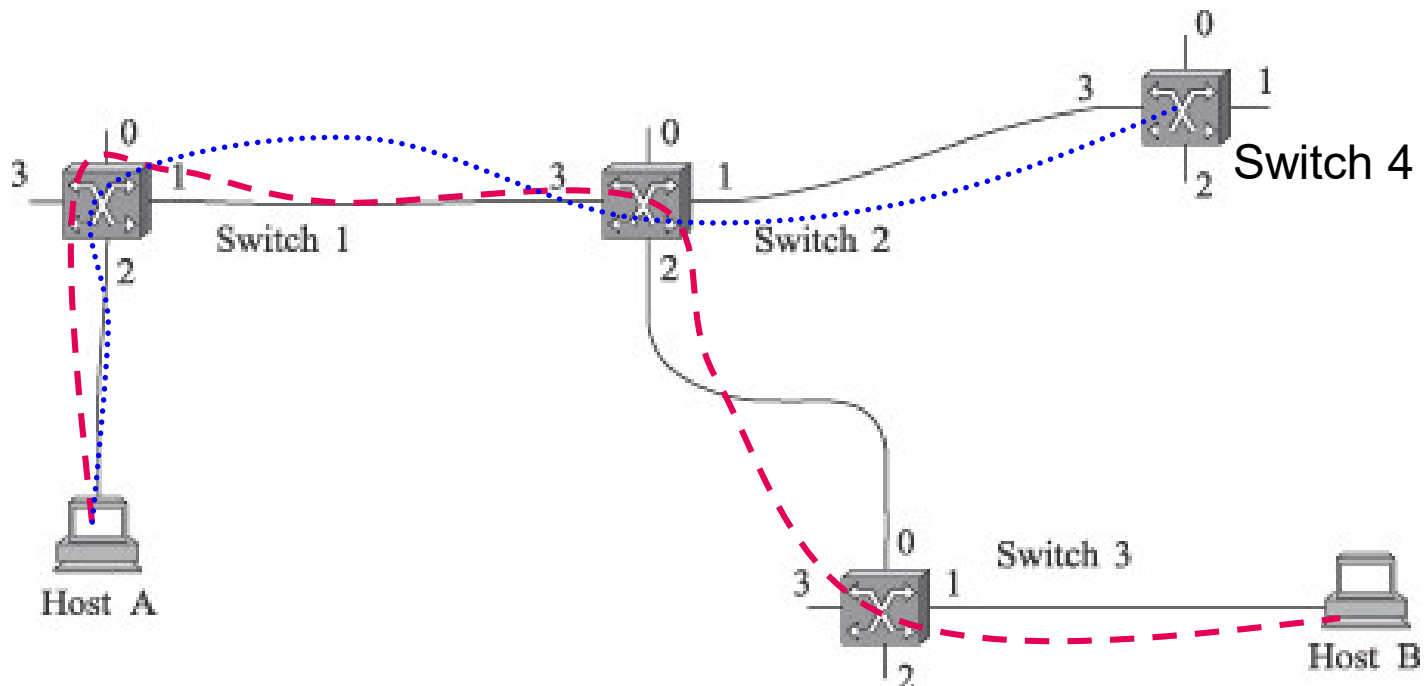

# Virtual Circuit Switching: Connection Setup

---

## □ Connection setup

- Permanent virtual circuit (PVC): manual configured → unmanageable for great number of nodes
- Switched virtual circuit (SVC): automatically configured via signaling
  - A process similar to datagram model

# Virtual Circuit: Discussion

---

- ❑ Connection setup takes 1 RTT minimally
- ❑ VCI number typically needs less memory space. Per-packet overhead is less than that of the datagram model
- ❑ Need VC re-setup in case of a connection failure
- ❑ Possible to allocate network resources during VC setup

# Comparison of Datagram and Virtual Circuit

---

## ❑ Virtual Circuit


- Need connection setup
  - ❑ Typically wait full RTT for connection setup before sending first data packet.
- While the connection request contains the full address for destination, each data packet contains only a small identifier, making the per-packet header overhead small.
  - ❑ In datagram switching: forwarding table contains entries for every host → large table → more memory, slow lookup
- Delivery assurance or failure
  - ❑ If a switch or a link in a connection fails, the connection is broken and a new one needs to be established.
- Connection setup provides an opportunity to reserve resources → Quality of Service (QoS)

## ❑ Datagram

- No connection setup
  - ❑ There is no RTT delay waiting for connection setup; a host can send data as soon as it is ready.
- Since every packet must carry the full address of the destination, the overhead per packet is higher than for the connection-oriented model.
  - ❑ In virtual circuit switching: VC table contains only “circuits” to be used → smaller table → less memory, fast lookup
- Delivery assurance or failure
  - ❑ Source host has no way of knowing if the network is capable of delivering a packet or if the destination host is even up.
- Since packets are treated independently, it is possible to route around link and node failures → difficult to satisfy QoS


# Source Routing

- ❑ Source host knows network topology to deliver a packet/frame
- ❑ Source host places output ports of each switch along the route into the frame header
  - Example: Host A sends a frame to host B

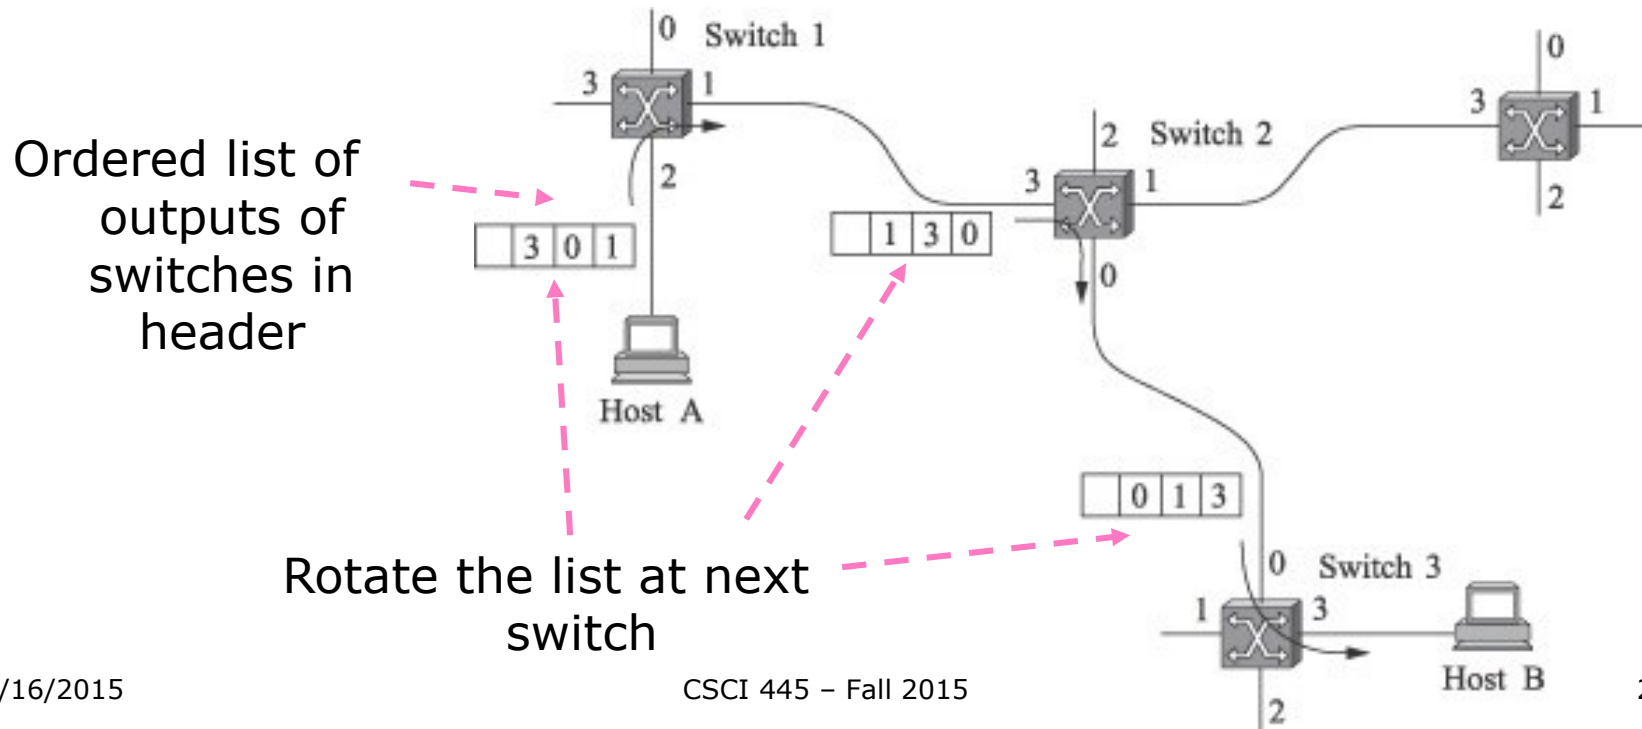

# Exercise L8-3

- Assume source routing presented in previous slide is used, show headers of a frame leaves from Host H and arrives at Host D at each switches along the path

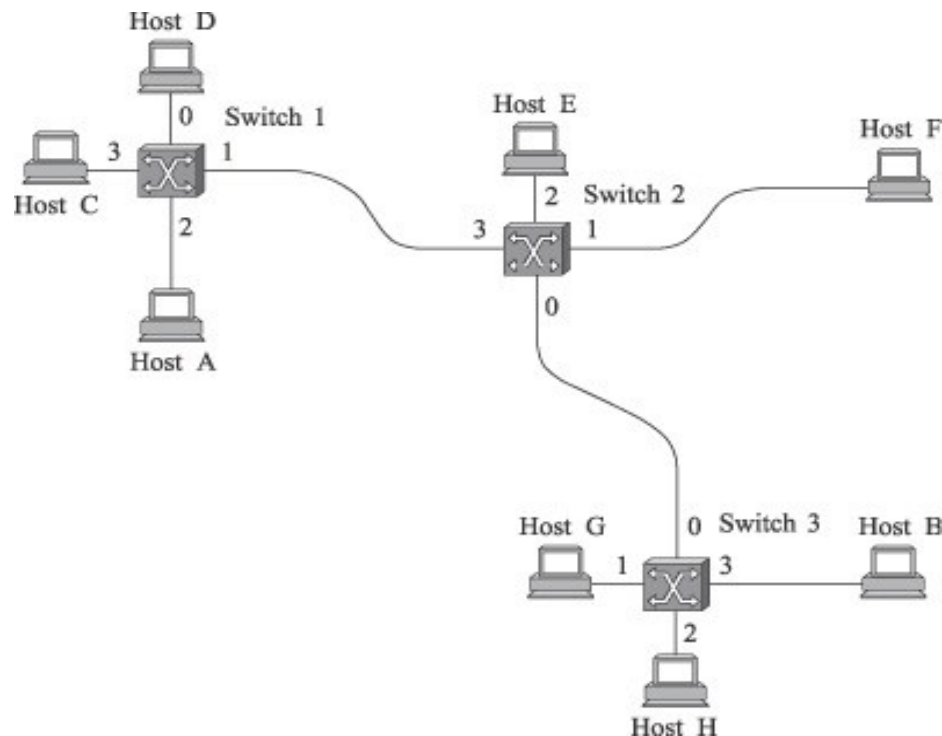



# Summary

---

- ❑ Switches → scalable networks
- ❑ Datagram switching
- ❑ Virtual circuit switching
- ❑ Source routing
- ❑ *Q: Example in practice?*
  - *Ethernet*