

Subnetting and Classless Addressing



Hui Chen, Ph.D.
Dept. of Engineering & Computer Science
Virginia State University
Petersburg, VA 23806

Acknowledgements

- ❑ Some pictures used in this presentation were obtained from the Internet
- ❑ The instructor used the following references
 - Larry L. Peterson and Bruce S. Davie, Computer Networks: A Systems Approach, 5th Edition, Elsevier, 2011
 - Andrew S. Tanenbaum, Computer Networks, 5th Edition, Prentice-Hall, 2010
 - James F. Kurose and Keith W. Ross, Computer Networking: A Top-Down Approach, 5th Ed., Addison Wesley, 2009
 - Larry L. Peterson's (<http://www.cs.princeton.edu/~llp/>) Computer Networks class web site


Outline

- Problem to scale to global network
 - Many networks organized in hierarchical manner
 - Scarcity of IP address
- Solution
 - Subnetting
 - Supernetting (classless routing)

Is 2^{32} too small a number?

□ IPv4 address


- 32 bit integers $\sim 2^{32} = 4,294,967,296$
- Many addresses, but not too many networks!

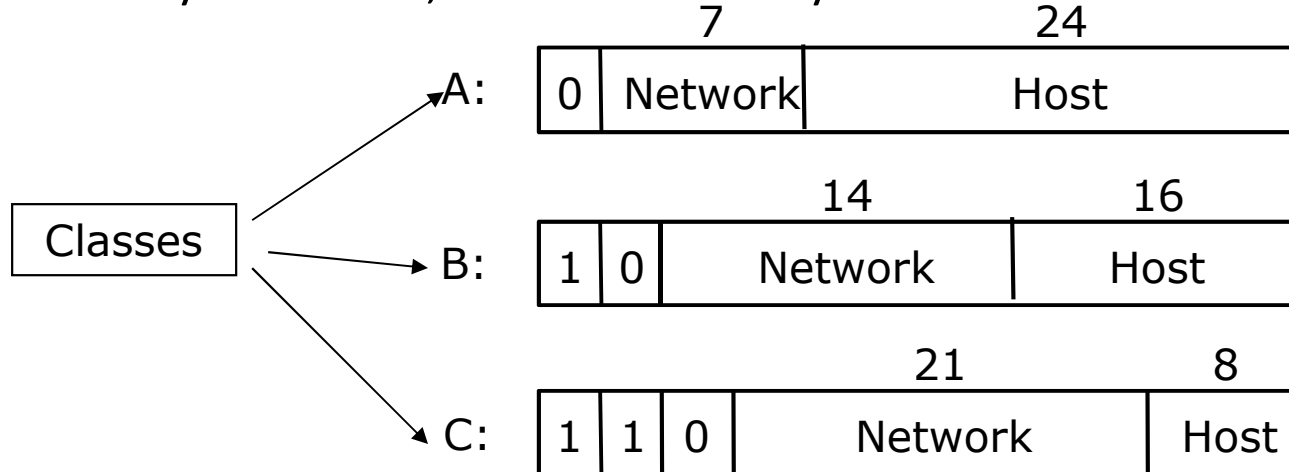

- Testimony: <http://www.iana.org/assignments/ipv4-address-space/>
- Examples
 - A network of two nodes needs a class C network
 - A network of 256 nodes needs a class B network

Can the number of networks be too many?

- How many class B networks are there?
- Potentially how big a routing table can be?

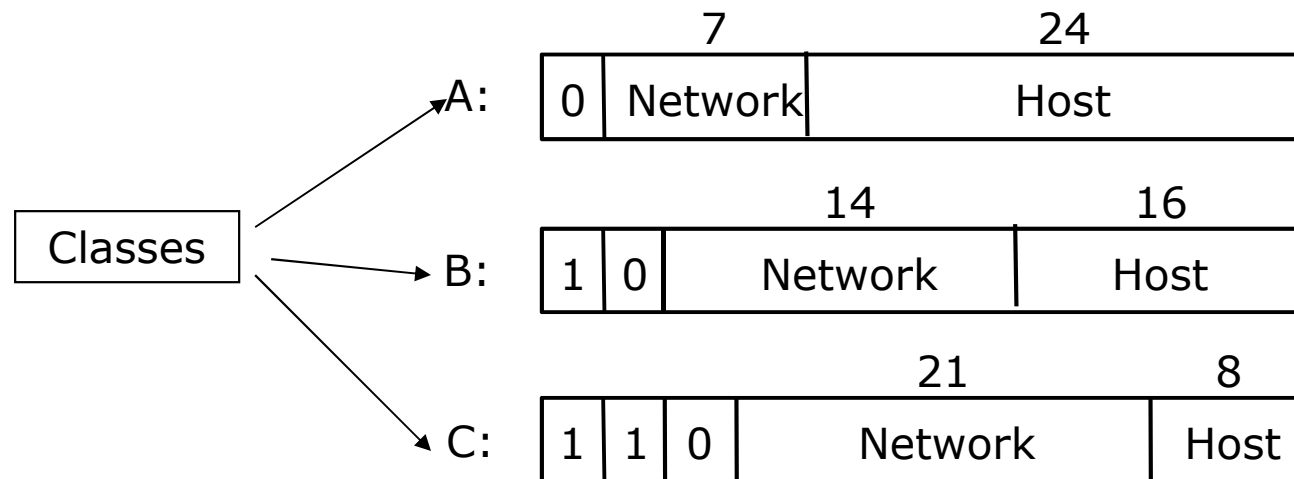

Subnetting

- ❑ Add another level to address/routing hierarchy: *subnet*
- ❑ *Subnet masks* define variable partition of host part of class A and B addresses
- ❑ Subnets visible only within site

Network number	Host number
----------------	-------------

Class B address


11111111111111111111111111111111	00000000
----------------------------------	----------

Subnet mask (255.255.255.0)

Network number	Subnet ID	Host ID
----------------	-----------	---------


Subnetted address

Subnetting: Example

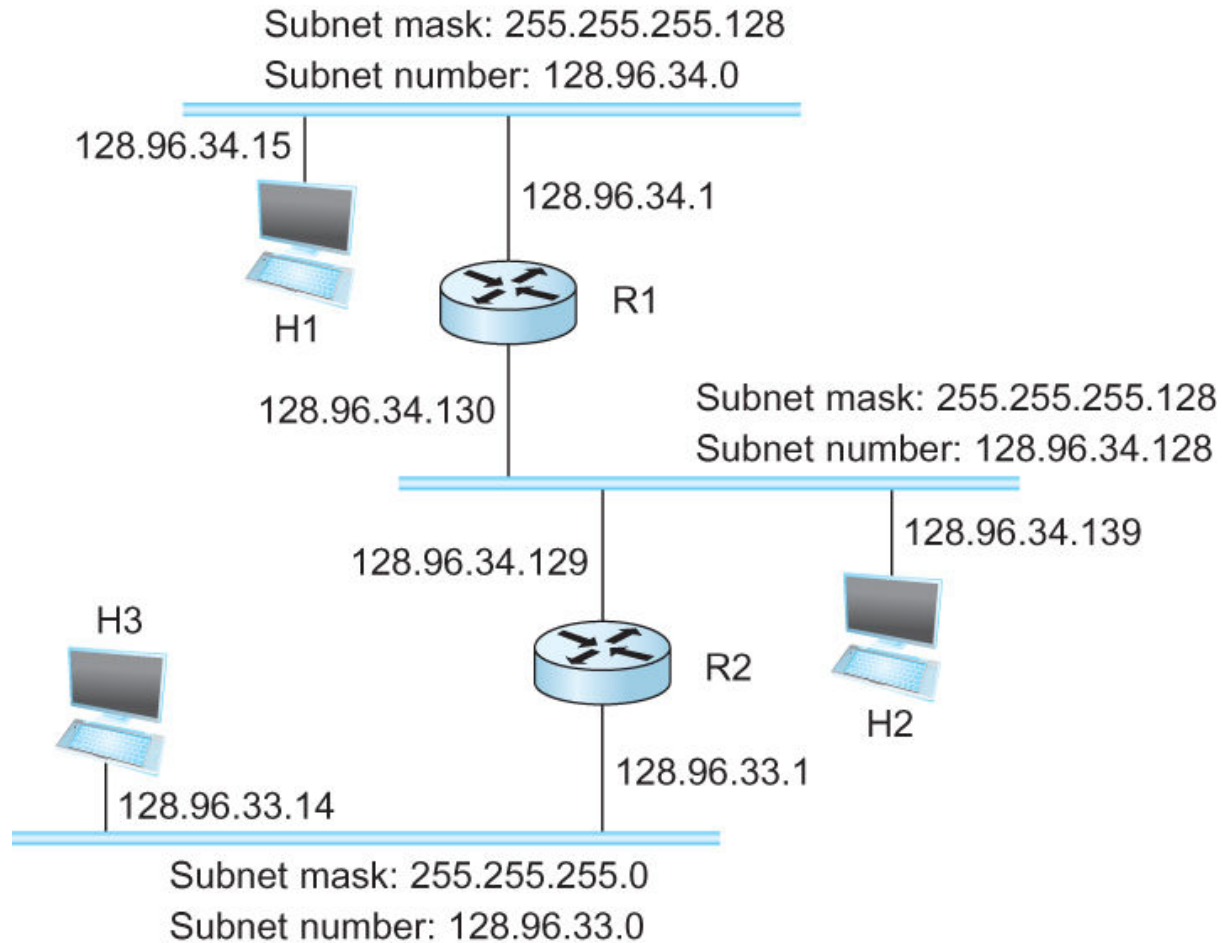

Subnetting: Example

Forwarding Table at Router R1

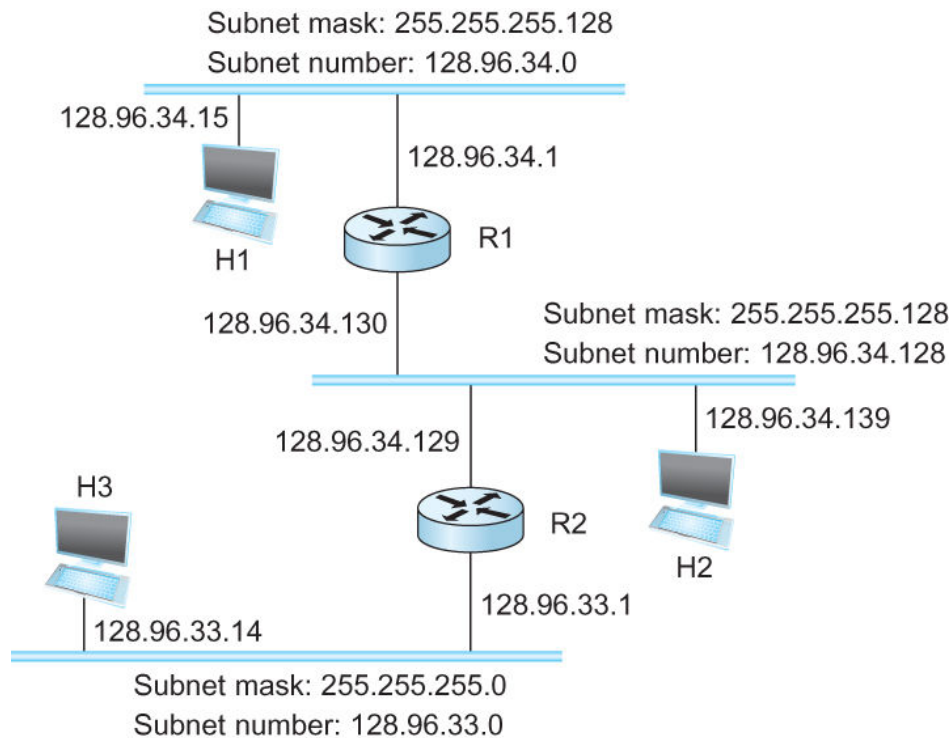

SubnetNumber	SubnetMask	NextHop
128.96.34.0	255.255.255.128	Interface 0
128.96.34.128	255.255.255.128	Interface 1
128.96.33.0	255.255.255.0	R2

Forwarding Algorithm


```
D = destination IP address
for each entry < SubnetNum, SubnetMask, NextHop>
  D1 = SubnetMask & D
  if D1 = SubnetNum
    if NextHop is an interface
      deliver datagram directly to destination
    else
      deliver datagram to NextHop (a router)
```

Subnetting: Discussion

- ❑ Would use a default router if nothing matches
- ❑ Subnet masks do not have to align with a byte boundary
- ❑ Subnet masks need **not** to be contiguous 1's
 - 255.255.1.0 is OK
 - ❑ 11111111 11111111 00000001 00000000
 - ❑ What is subnet number of IP address 128.96.34.1?
10000000 01100000 00100010 00000000 &
11111111 11111111 00000001 00000000 →
10000000 01100000 00000000 00000000 →
128.96.0.0 → can not directly tell from the IP address
 - In practice, use contiguous 1's
- ❑ Multiple subnets can be on a single physical network
- ❑ Subnets not visible from the rest of the Internet

Subnetting: Discussion

- How do you tell whether an IP address is on a given subnet?

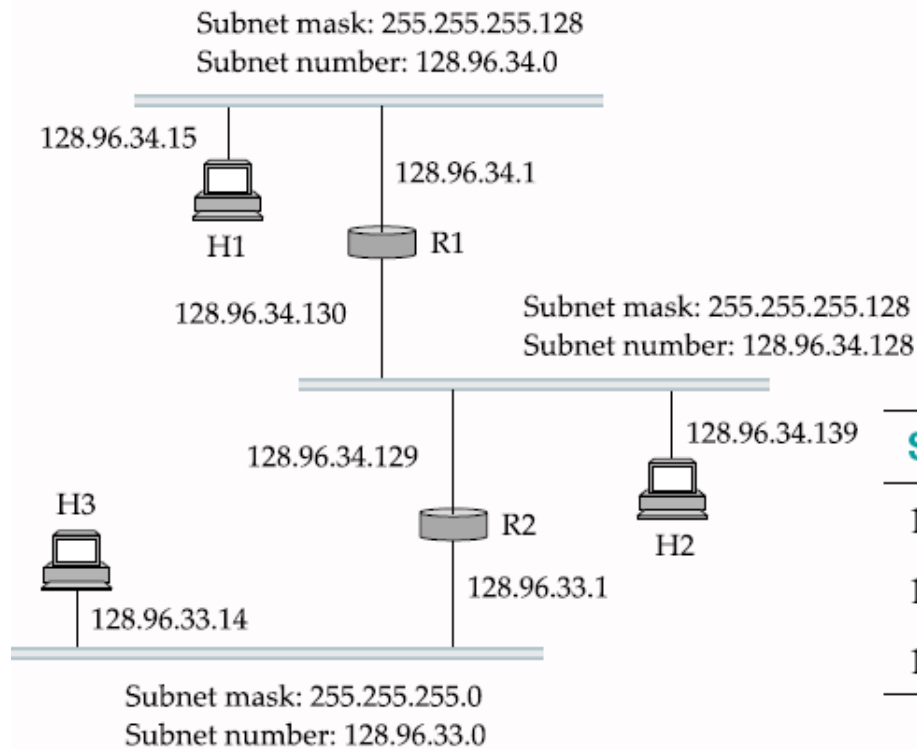

SubnetNumber	SubnetMask	NextHop
128.96.34.0	255.255.255.128	Interface 0
128.96.34.128	255.255.255.128	Interface 1
128.96.33.0	255.255.255.0	R2

Exercise L11-1

- State to what next hop the IP packets addressed to each of the following destinations will be delivered

- (a) 128.96.171.92
- (b) 128.96.167.151
- (c) 128.96.163.151
- (d) 128.96.169.192
- (e) 128.96.165.121

Table 3.19 Routing Table for Exercise 56

SubnetNumber	SubnetMask	NextHop
128.96.170.0	255.255.254.0	Interface 0
128.96.168.0	255.255.254.0	Interface 1
128.96.166.0	255.255.254.0	R2
128.96.164.0	255.255.252.0	R3
<default>		R4

Scaling Problem

- Need to address two scaling concerns in the Internet
 - The growth of backbone routing table as more and more network numbers need to be stored in them
 - Potential exhaustion of the 32-bit address space
- Address assignment efficiency
 - Arises because of the IP address structure with class A, B, and C addresses
 - Forces us to hand out network address space in fixed-size chunks of three very different sizes
 - A network with two hosts needs a class C address:
 - Address assignment efficiency = $2/255 = 0.78$
 - A network with 256 hosts needs a class B address
 - Address assignment efficiency = $256/65535 = 0.39$

First Attempt: No to Class B?

- ❑ Exhaustion of IP address space centers on exhaustion of the class B network numbers
- ❑ Solution
 - Say “NO” to any Autonomous System (AS) that requests a class B address unless they can show a need for something close to 64K addresses
 - Instead give them an appropriate number of class C addresses
 - For any AS with at least 256 hosts, we can guarantee an address space utilization of at least 50%
- ❑ What is the problem with this solution?

First Attempt: No to Class B?

- ❑ Problem with this solution
 - Excessive storage requirement at the routers.
- ❑ If a single AS has, say 16 class C network numbers assigned to it,
 - Every Internet backbone router needs 16 entries in its routing tables for that AS
 - This is true, even if the path to every one of these networks is the same
- ❑ If we had assigned a class B address to the AS
 - The same routing information can be stored in one entry
 - Efficiency = $16 \times 255 / 65,536 = 6.2\%$

Addressing Scaling Problem

- ❑ Classless Inter-Domain Routing (CIDR)
 - Addresses two scaling concerns in the Internet
 - ❑ Backbone routing tables are getting big
 - ❑ Potential exhaustion of the 32-bit address space
 - Balancing two factors
 - ❑ Minimize the number of routes that a router needs to know
 - ❑ Allocate addresses efficiently.
 - CIDR uses aggregate routes
 - ❑ Uses a single entry in the forwarding table to tell the router how to reach a lot of different networks
 - ❑ Breaks the rigid boundaries between address classes

Classless Addressing: Example

- ❑ Consider an AS with 16 class C network numbers.
- ❑ Instead of handing out 16 addresses at random, hand out a block of contiguous class C addresses
- ❑ Suppose we assign the class C network numbers from 192.4.16 through 192.4.31
- ❑ Observe that top 20 bits of all the addresses in this range are the same (11000000 00000100 0001)
 - We have created a 20-bit network number (which is in between class B network number and class C number)
- ❑ Requires to hand out blocks of class C addresses that share a common prefix (sometimes, called supnetting)

Classless Addressing: Notation

- ❑ Requires to hand out blocks of addresses that share a common prefix
- ❑ Convention
 - Place a /X after the prefix where X is the prefix length in bits
- ❑ Example
 - 20-bit prefix for all the networks 192.4.16 through 192.4.31: 192.4.16/20
 - A single class C network number, which is 24 bits long: 192.4.16/24


Routing and Classes Addressing

- ❑ How do the routing protocols handle this classless addresses
 - It must understand that the network number may be of any length
- ❑ Represent network number with a single pair

`<length, value>`
- ❑ All routers must understand CIDR addressing

Routing and Classless Addressing: Example

□ Route aggregation with CIDR

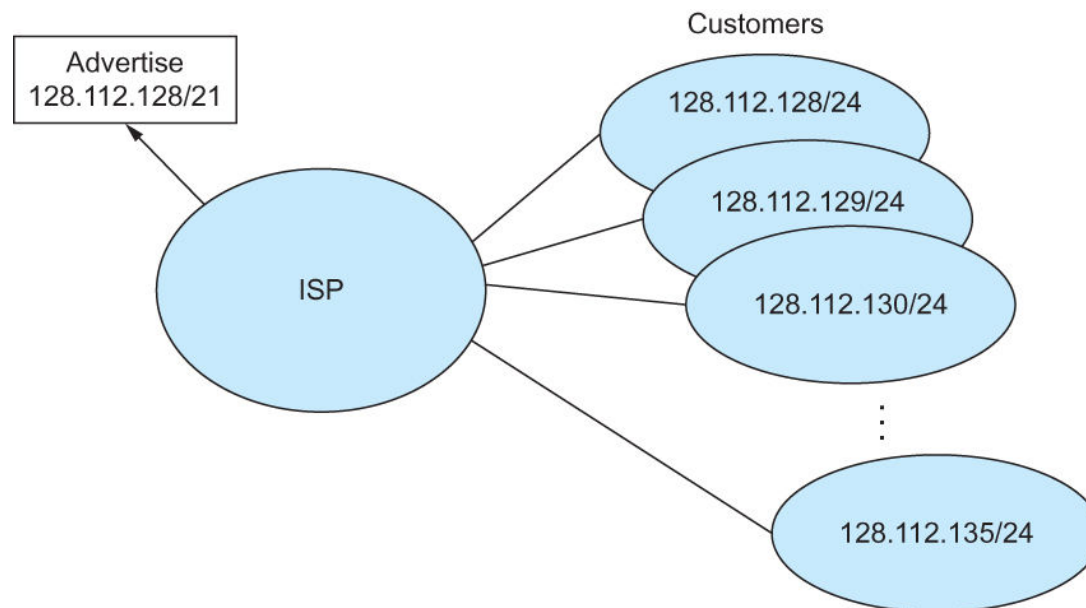

IP Forwarding Revisited

- Original *assumptions* in IP forwarding mechanism
 - It can find the network number from destination IP address in a packet
 - Then look up that number in the forwarding table
- Need to *change* this assumption in case of CIDR

IP Forwarding in CIDR

- ❑ Prefixes may be of any length, from 2 to 32 bits
 - Prefixes in the forwarding tables may overlap
- ❑ Some addresses may match more than one prefix
 - Example
 - ❑ Both 171.69/16 and 171.69.10/24 may coexist in the forwarding table of a single router
 - ❑ A packet destined to 171.69.10.5 clearly matches both prefixes.
 - Principle of “longest match”
 - ❑ A packet destined to 171.69.10.5 matches prefix 171.69.10/24
 - ❑ A packet destined to 171.69.20.5 matches 171.69/16

Exercise L11-2

- State to what next hop the IP packets addressed to each of the following destinations will be delivered

- (a) C4.4B.31.2E
- (b) C4.5E.05.09
- (c) C4.4D.31.2E
- (d) C4.5E.03.87
- (e) C4.5E.7F.12
- (f) C4.5E.D1.02

Table 3.21 Routing Table for Exercise 73

Net/MaskLength	Nexthop
C4.5E.2.0/23	A
C4.5E.4.0/22	B
C4.5E.C0.0/19	C
C4.5E.40.0/18	D
C4.4C.0.0/14	E
C0.0.0.0/2	F
80.0.0.0/1	G

Summary

- Subnetting
 - Network number and network mask
- Classless addressing
 - Network prefix and length of prefix