

Numeric Data Types and Operations

Hui Chen

Department of Computer & Information Science

Brooklyn College

Objectives

- To program with assignment statements and assignment expressions (§2.6).
- To use constants to store permanent data (§2.7).
- To name classes, methods, variables, and constants by following their naming conventions (§2.8).
- To explore Java numeric primitive data types: **byte**, **short**, **int**, **long**, **float**, and **double** (§2.9.1).
- To read a **byte**, **short**, **int**, **long**, **float**, or **double** value from the keyboard (§2.9.2).
- To perform operations using operators **+**, **-**, *****, **/**, and **%** (§2.9.3).
- To perform exponent operations using **Math.pow(a, b)** (§2.9.4).
- To write integer literals, floating-point literals, and literals in scientific notation (§2.10).
- To write and evaluate numeric expressions (§2.11).

Outline

- Discussed
 - From “problem”, to “algorithm”, and to “implementation”
 - Design a program with input and output
 - Hardcode input
 - Read from users’ input (from console)
 - Dissecting the program
- This lesson covers
 - Naming convention (best practice)
 - Numeric data types
 - Read numeric values from users’ input
 - Numeric operators (operating on numeric data types)

Using Identifiers

- What names are valid?
 - Identifiers
 - Variable names
 - Class names
 - Method names
 - Constants

Identifiers

- An identifier is a sequence of characters that consist of letters, digits, underscores (_), and dollar signs (\$).
- An identifier must start with a letter, an underscore (_), or a dollar sign (\$). It cannot start with a digit.
- An identifier cannot be a reserved word.
 - See Appendix A of the textbook, “Java Keywords,” for a list of reserved words.
- An identifier cannot be true, false, or null (they are not keywords, but you cannot use them to name identifiers).
- An identifier can be of any length.

Best Practice. Following Naming Convention

- Choose meaningful and descriptive names.
 - For classes, variables, constants, methods
 - We will create our own methods in the future
- Naming conventions for
 - Variables and method names
 - Class names
 - Constants

Variables and Method Names

- Begin with lowercase letters.
- If the name consists of several words, concatenate all in one, use lowercase for the first word, and capitalize the first letter of each subsequent word in the name.
- Example
 - the variables `radius` and `area`, and
 - the method `computeArea`.

Class Names

- Begin with uppercase letters
- Capitalize the first letter of each word in the name.
- Example
 - the class name `ComputeArea`

Constants

- All caps!
- Capitalize all letters in constants, and use underscores to connect words.
- Example
 - the constant `PI`
 - the constant `MAX_VALUE`

Best Practice. Using Named Constants

- Why?
- Examples

```
final datatype CONSTANTNAME = VALUE;
```

```
final double PI = 3.14159;
```

```
final int SIZE = 3;
```

Questions?

- Identifiers
- Naming convention
- Common errors:
 - A variable/method/constant/class must be declared before you can reference to it

Numeric Data Types

Name	Range	Storage Size
<code>byte</code>	-2^7 to $2^7 - 1$ (-128 to 127)	8-bit signed
<code>short</code>	-2^{15} to $2^{15} - 1$ (-32768 to 32767)	16-bit signed
<code>int</code>	-2^{31} to $2^{31} - 1$ (-2147483648 to 2147483647)	32-bit signed
<code>long</code>	-2^{63} to $2^{63} - 1$ (i.e., -9223372036854775808 to 9223372036854775807)	64-bit signed
<code>float</code>	Negative range: -3.4028235E+38 to -1.4E-45 Positive range: 1.4E-45 to 3.4028235E+38	32-bit IEEE 754
<code>double</code>	Negative range: -1.7976931348623157E+308 to -4.9E-324 Positive range: 4.9E-324 to 1.7976931348623157E+308	64-bit IEEE 754

Reading Numbers from the Console Input

- Using Scanner and its methods
- Example

```
Java.util.Scanner sc = new java.util.Scanner(System.in)  
double d = sc.nextDouble()
```

Scanner and Methods

Method	Description
<code>nextByte()</code>	reads an integer of the <code>byte</code> type.
<code>nextShort()</code>	reads an integer of the <code>short</code> type.
<code>nextInt()</code>	reads an integer of the <code>int</code> type.
<code>nextLong()</code>	reads an integer of the <code>long</code> type.
<code>nextFloat()</code>	reads a number of the <code>float</code> type.
<code>nextDouble()</code>	reads a number of the <code>double</code> type.

Let's try these methods out

Questions?

Numeric Operations

Name	Meaning	Example	Result
+	Addition	$34 + 1$	35
-	Subtraction	$34.0 - 0.1$	33.9
*	Multiplication	$300 * 30$	9000
/	Division	$1.0 / 2.0$	0.5
%	Remainder	$20 \% 3$	2

Integer Division

- The result is an integer. This is important!

$+$, $-$, $*$, $/$, and $\%$

$5 / 2$ yields an integer 2.

$5.0 / 2$ yields a double value 2.5

$5 \% 2$ yields 1 (the remainder of the division)


Remainder Operator

- Remainder is very useful in programming.
- Example
 - How to determine if a number is even or odd?
 - If we were going to meet in 10 days, what day would that day be?

What day is in 10 days?

- Today is Wednesday

Wednesday is the 3rd day in a week (Counting from 0)

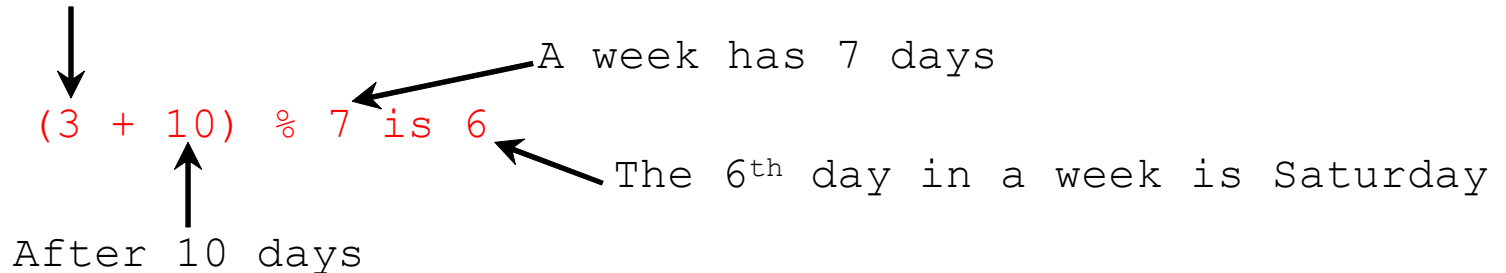

Questions?

Let's try it out

- Let's code this ...

Problem. Convert Seconds to Minutes and Remaining Seconds

- Write a program to read *seconds* from the console, and obtain the *minutes* and *remaining seconds* from the *seconds*
- Algorithm
 - Read seconds from the console
 - Obtain the minutes in the seconds
 - Obtain the remaining seconds
 - Print out the minute and the remaining seconds in a nice format

Implementation

```
import java.util.Scanner;
public class DisplayTime {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        System.out.print("Enter an integer for seconds: "); // Prompt the user for input
        int seconds = input.nextInt();
        int minutes = seconds / 60; // Obtain minutes in seconds
        int remainingSeconds = seconds % 60; // Obtain seconds remaining
        System.out.println(seconds + " seconds is " + minutes +
            " minutes and " + remainingSeconds + " seconds"); // print those nicely
    }
}
```


Questions?

Integers vs. Float-Point Numbers

- Integers stored exactly while float-point numbers approximately
 - Calculations involving floating-point numbers are approximated
 - Examples
 - `System.out.println(1.0-0.1-0.1-0.1-0.1-0.1);`
 - `System.out.println(1.0 - 0.9);`
 - `(1.0-0.9) == 0.1?`

Questions?

- More from our lab ...
 - How about
 - `System.out.println(Math.PI * 5.8 * 5.8);`
 - `System.out.println(Math.PI * (5.8 * 5.8));`
 - `System.out.println(5.8 * 5.8 * Math.PI);`
 - ...

Exponent Operations

- Use the pow method in the Math class
- Examples

```
System.out.println(Math.pow(2, 3));
```

```
// Displays 8.0
```

```
System.out.println(Math.pow(4, 0.5));
```

```
// Displays 2.0
```

```
System.out.println(Math.pow(2.5, 2));
```

```
// Displays 6.25
```

```
System.out.println(Math.pow(2.5, -2));
```

```
// Displays 0.16
```

Questions?

Number Literals

- A *literal* is a constant value that appears directly in the program.
- A *number literal* is a numeric value that appears directly in the program (hard coded numeric values).
- Examples
 - 34, 1,000,000, and 5.0 are literals in the following statements:

```
int i = 34;
```

```
long x = 1000000;
```

```
double d = 5.0;
```

Have you seen String literals?

Integer Literals and Variables

- An integer literal can be assigned to an integer variable as long as it can fit into the variable.
- A compilation error would occur if the literal were too large for the variable to hold.
- Example.
 - `byte b = 1000`
- Data types of integer literals
 - An integer literal is assumed to be of the ***int*** type, whose value is between -2^{31} (-2147483648) to $2^{31}-1$ (2147483647).
 - To denote an integer literal of the ***long*** type, append it with the letter L or l.
 - L is preferred because l (lowercase L) can easily be confused with 1 (the digit one).

Questions?

Floating-Point Literals

- Floating-point literals are written with a decimal point.
- Data types of float-point literals
 - By default, a floating-point literal is treated as a double type value.
 - For example, 5.0 is considered a **double** value, not a **float** value.
 - Make a number a **float** by appending the letter f or F, and make a number a **double** by appending the letter d or D.
 - For example, you can use 100.2f or 100.2F for a float number, and 100.2d or 100.2D for a double number.

double vs. float

- The double type values are more accurate than the float type values.
- Examples

```
System.out.println("1.0 / 3.0 is " + 1.0 / 3.0);
```

displays `1.0 / 3.0 is 0.3333333333333333`



16 digits

```
System.out.println("1.0F / 3.0F is " + 1.0F / 3.0F);
```

displays `1.0F / 3.0F is 0.33333334`



7 digits

Scientific Notation

- Floating-point literals can also be specified in scientific notation
- Examples
 - $1.23456e+2$, same as $1.23456e2$, is equivalent to 123.456
 - $1.23456e-2$ is equivalent to 0.0123456 .
 - E (or e) represents an exponent and it can be either in lowercase or uppercase

Questions?

Writing Arithmetic Expressions

- Math

$$\frac{3 + 4x}{5} - \frac{10(y - 5)(a + b + c)}{x} + 9\left(\frac{4}{x} + \frac{9 + x}{y}\right)$$


- Java

$$(3+4*x)/5 - 10*(y-5)*(a+b+c)/x + 9*(4/x + (9+x)/y)$$

Evaluate Arithmetic Expressions

- Though Java has its own way to evaluate an expression behind the scene, the result of a Java expression and its corresponding arithmetic expression are the same.
- Therefore, you can safely apply the arithmetic rule for evaluating a Java expression

Example

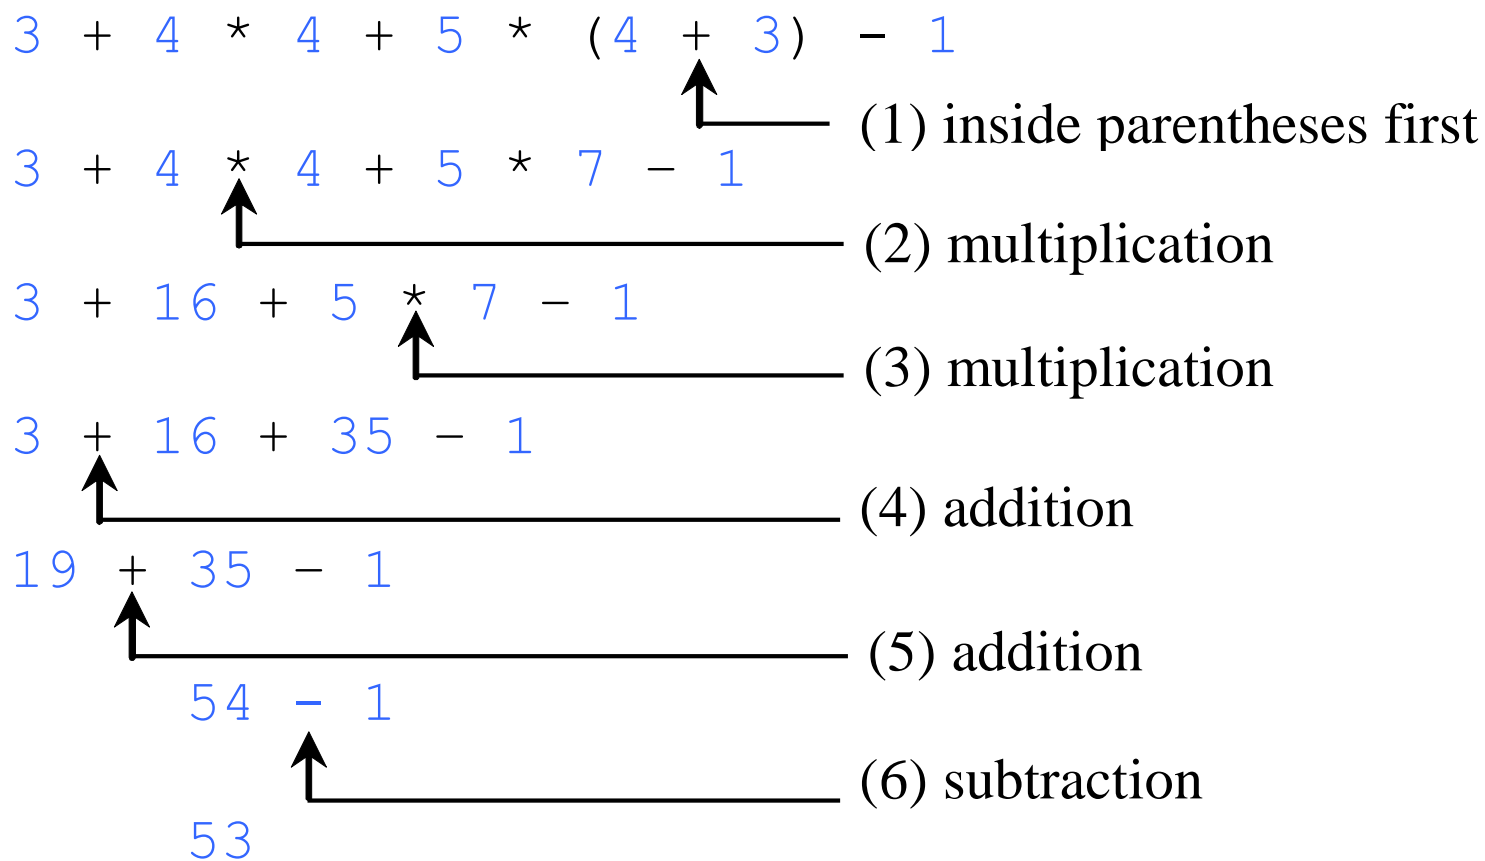

Questions?

Let's try these out.

Problem. Converting Temperatures

- It is 70 degrees today, is it hot? Your Asian or European friends ask you.
- Convert Fahrenheit degree to Celsius
- Algorithm
 - Read a Fahrenheit degree from users' input on the console
 - Convert the Fahrenheit degree to the Celsius degree
$$celsius = \left(\frac{5}{9}\right)(fahrenheit - 32)$$
 - Print nicely the result

Implementation

```
import java.util.Scanner;

public class FahrenheitToCelsius {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        System.out.print("Enter a degree in Fahrenheit: ");
        double fahrenheit = input.nextDouble();
        // Convert Fahrenheit to Celsius
        double celsius = (5.0 / 9) * (fahrenheit - 32);
        System.out.println("Fahrenheit " + fahrenheit + " is " +
            celsius + " in Celsius");
    }
}
```

Questions?

Lab Exercise. Converting Celsius to Fahrenheit

- Write a program that reads a Celsius degree in a double value from the console, converts it to Fahrenheit, and displays the result with two digits after the decimal points.

$$\text{Fahrenheit} = \frac{9}{5} \text{Celsius} + 32$$

Lab Exercise. Compute Volume of Cylinder

- Write a program that reads in the radius and length of a cylinder from the console, compute the surface area and the volume of the cylinder, and display the results *nicely*.

$$A = 2\pi r^2 + 2\pi r l$$

$$V = \pi r^2 l$$

- where A is the surface area, V the volume, r the radius, and l is length