

CISC 7310X
C05b: CPU Scheduling
Criteria and Algorithms

Hui Chen

Department of Computer & Information Science

CUNY Brooklyn College

Acknowledgement

- This slides are a revision of the slides by the authors of the textbook

Outline

- Scheduling Criteria
- Scheduling Algorithms

- Thread Scheduling
- Multi-Processor Scheduling
- Real-Time CPU Scheduling
- Operating Systems Examples
- Algorithm Evaluation

Scheduling Criteria

- **CPU utilization** - keep the CPU as busy as possible
- **Throughput** - # of processes that complete their execution per time unit
- **Turnaround time** - amount of time to execute a particular process
- **Waiting time** - amount of time a process has been waiting in the ready queue
- **Response time** - amount of time it takes from when a request was submitted until the first response is produced, not output (for time-sharing environment)

Scheduling Algorithm Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

Questions?

- CPU scheduling criteria?
- Can we optimize all of them? How about different systems, such as, batch system, interactive system, and real time system?

Scheduling Algorithms

- First- Come, First-Served (FCFS) Scheduling
- Shortest-Job-First (SJF) Scheduling
 - Preemptive shortest-remaining-time-first
- Round Robin (RR)
- Priority Scheduling
 - Priority Scheduling with Round-Robin

First-Come, First-Served (FCFS) Scheduling

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1, P_2, P_3
The Gantt Chart for the schedule is:



- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: $(0 + 24 + 27)/3 = 17$

FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order:

$$P_2, P_3, P_1$$

- The Gantt chart for the schedule is:



- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$
- Much better than previous case
- **Convoy effect** - short process behind long process
 - Consider one CPU-bound and many I/O-bound processes


Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst
 - Use these lengths to schedule the process with the shortest time
- SJF is optimal - gives minimum average waiting time for a given set of processes
 - The difficulty is knowing the length of the next CPU request
 - Could ask the user

Example of SJF

<u>Process</u>	<u>Burst Time</u>
P_1	6
P_2	8
P_3	7
P_4	3

- SJF scheduling chart

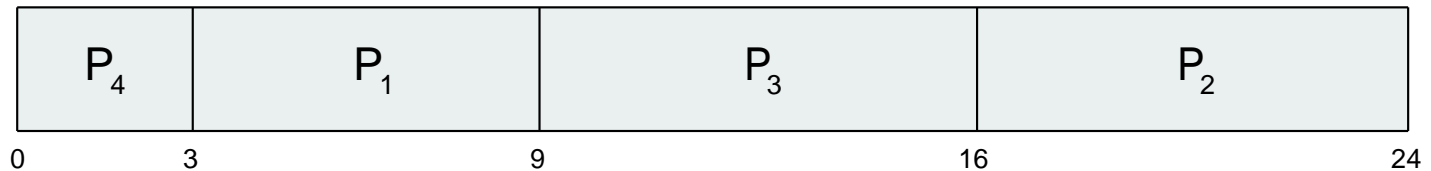

- Average waiting time = $(3 + 16 + 9 + 0) / 4 = 7$


SJF: Assumptions

- The length of the next CPU burst is known.
- But, how do we determine length of next CPU burst?

Determining Length of Next CPU Burst

- Can only estimate the length - should be similar to the previous one
 - Then pick process with shortest predicted next CPU burst
- Can be done by using the length of previous CPU bursts, using exponential averaging
 1. t_n = actual length of n^{th} CPU burst
 2. τ_{n+1} = predicted value for the next CPU burst
 3. $\alpha, 0 \leq \alpha \leq 1$
 4. Define : $\tau_{n+1} = \alpha t_n + (1 - \alpha)\tau_n$.
- Commonly, α set to $\frac{1}{2}$
- Preemptive version called **shortest-remaining-time-first**

Prediction of the Length of the Next CPU Burst

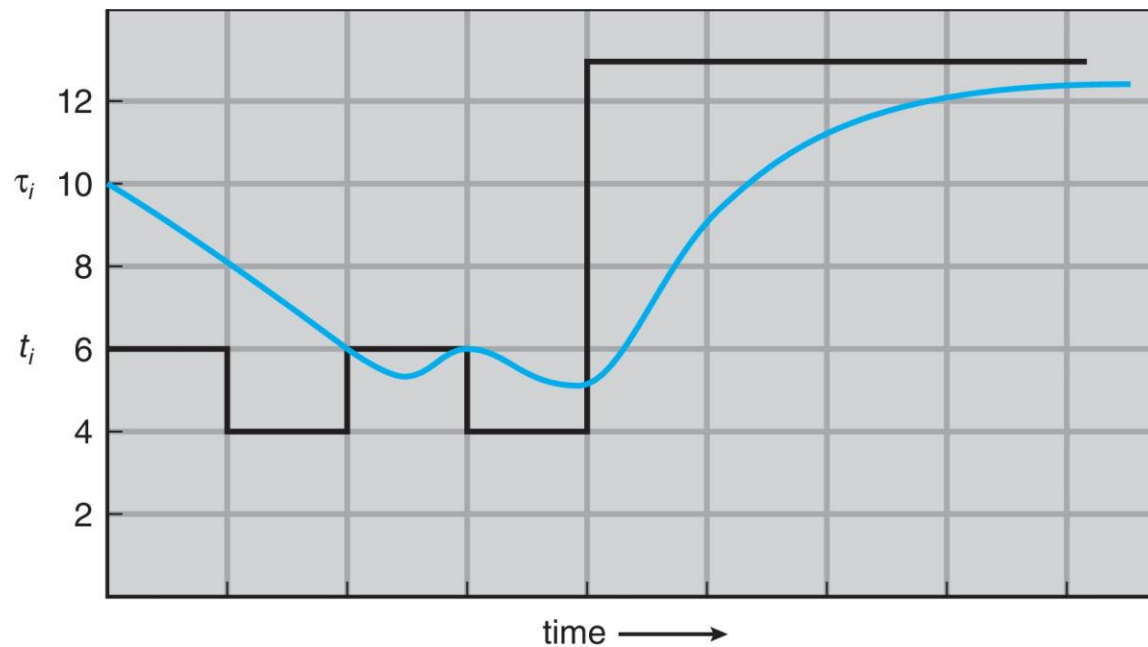

CPU burst (t_i)	6	4	6	4	13	13	13	...	
"guess" (τ_i)	10	8	6	6	5	9	11	12	...

Examples of Exponential Averaging

- $\alpha = 0$
 - $\tau_{n+1} = \tau_n$
 - Recent history does not count
- $\alpha = 1$
 - $\tau_{n+1} = \alpha t_n$
 - Only the actual last CPU burst counts
- If we expand the formula, we get:

$$\begin{aligned}\tau_{n+1} = & \alpha t_n + (1 - \alpha)\alpha t_{n-1} + \dots \\ & + (1 - \alpha)^j \alpha t_{n-j} + \dots \\ & + (1 - \alpha)^{n+1} \tau_0\end{aligned}$$


- Since both α and $(1 - \alpha)$ are less than or equal to 1, each successive term has less weight than its predecessor

Example of Shortest-remaining-time-first

- Now we add the concepts of varying arrival times and preemption to the analysis

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0	8
P_2	1	4
P_3	2	9
P_4	3	5

- *Preemptive SJF Gantt Chart*

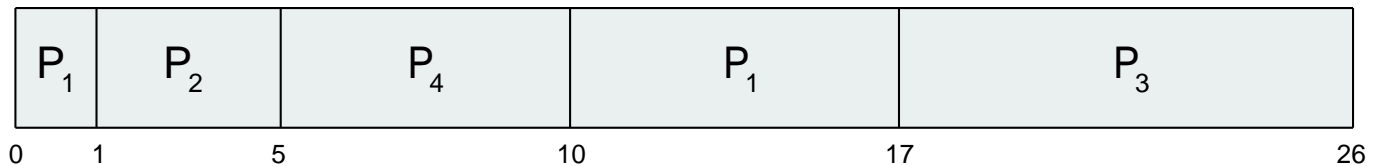

- Average waiting time = $[(10-1)+(1-1)+(17-2)+(5-3)]/4 = 26/4 = 6.5$ msec


Round Robin (RR)

- Each process gets a small unit of CPU time (**time quantum q**), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- If there are n processes in the ready queue and the time quantum is q , then each process gets $1/n$ of the CPU time in chunks of at most q time units at once. No process waits more than $(n-1)q$ time units.
- Timer interrupts every quantum to schedule next process
- Performance
 - q large \Rightarrow FIFO
 - q small $\Rightarrow q$ must be large with respect to context switch, otherwise overhead is too high

Example of RR with Time Quantum = 4


<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

- The Gantt chart is:

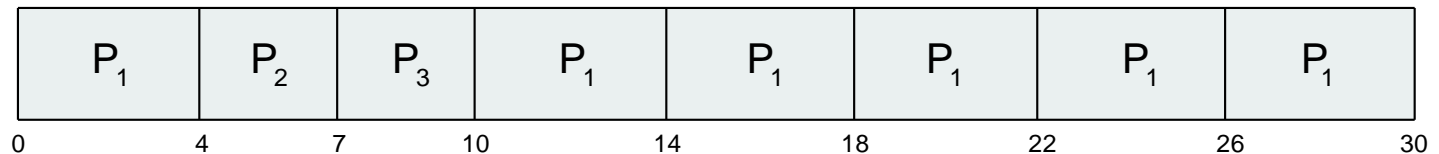


- Typically, higher average turnaround than SJF, but better **response**
- q should be large compared to context switch time
- q usually 10ms to 100ms, context switch < 10 usec

Time Quantum and Context Switch Time

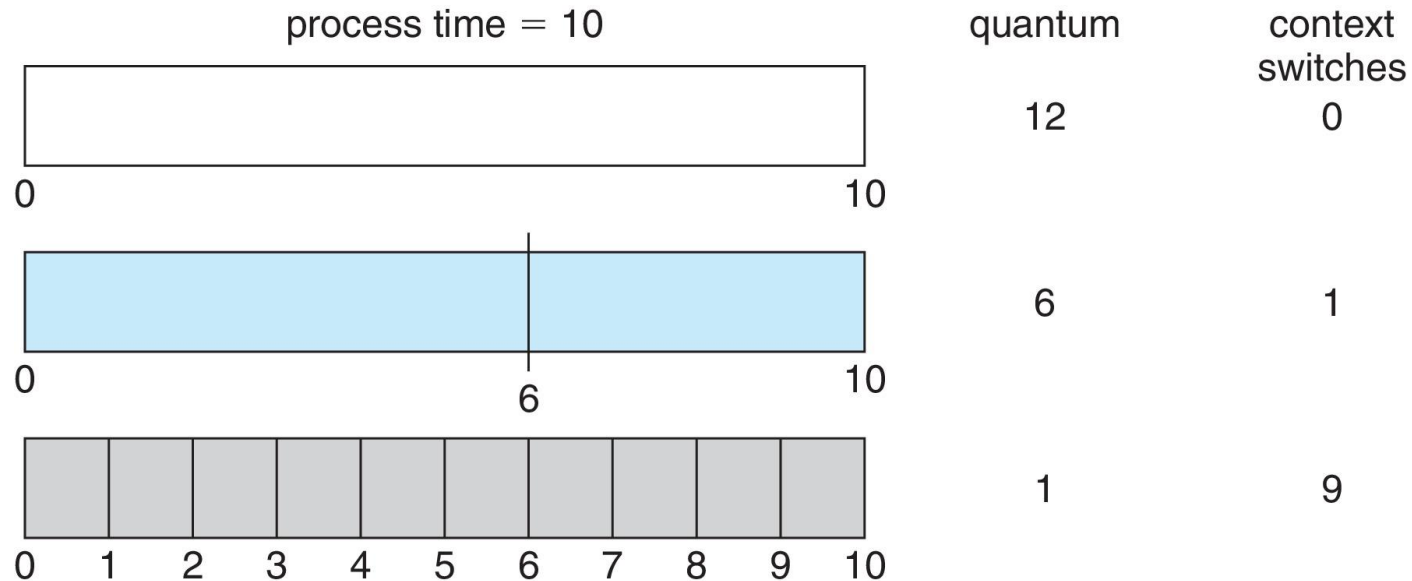

Turnaround Time Varies With The Time Quantum

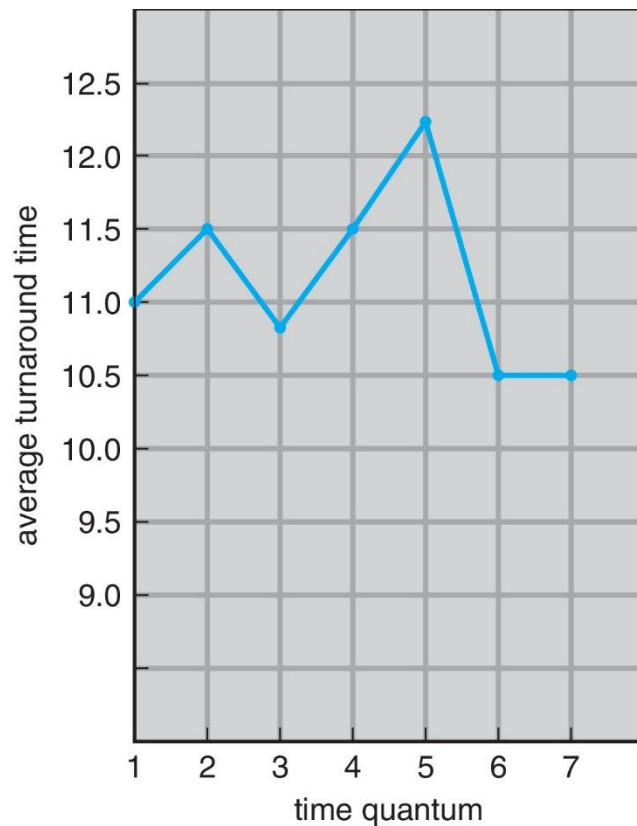

process	time
P_1	6
P_2	3
P_3	1
P_4	7

80% of CPU bursts should be shorter than q


Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer \equiv highest priority)
 - Preemptive
 - Nonpreemptive
- SJF is priority scheduling where priority is the inverse of predicted next CPU burst time
- Problem \equiv **Starvation** - low priority processes may never execute
- Solution \equiv **Aging** - as time progresses increase the priority of the process

Example of Priority Scheduling

<u>Process</u>	<u>Burst Time</u>	<u>Priority</u>
P_1	10	3
P_2	1	1
P_3	2	4
P_4	1	5
P_5	5	2

- Priority scheduling Gantt Chart

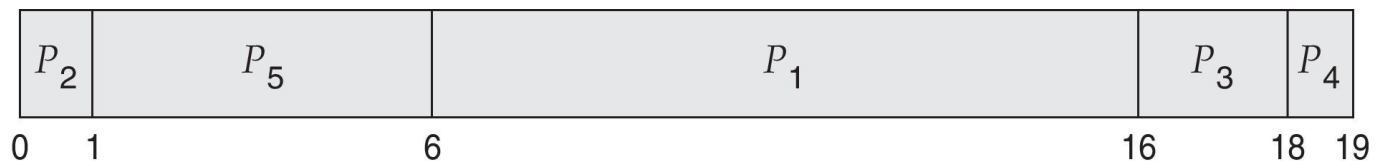


- Average waiting time = 8.2 msec

Priority Scheduling with Round-Robin

<u>Process</u>	<u>Burst Time</u>	<u>Priority</u>
P_1	4	3
P_2	5	2
P_3	8	2
P_4	7	1
P_5	3	3


- Run the process with the highest priority. Processes with the same priority run round-robin
- Gantt Chart with 2 ms time quantum

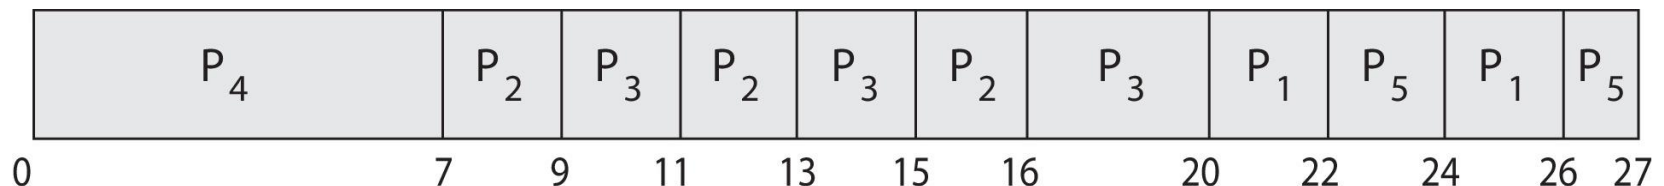

Priority Scheduling: Multilevel Queue


- With priority scheduling, have separate queues for each priority.
- Schedule the process in the highest-priority queue!

Multilevel Queue

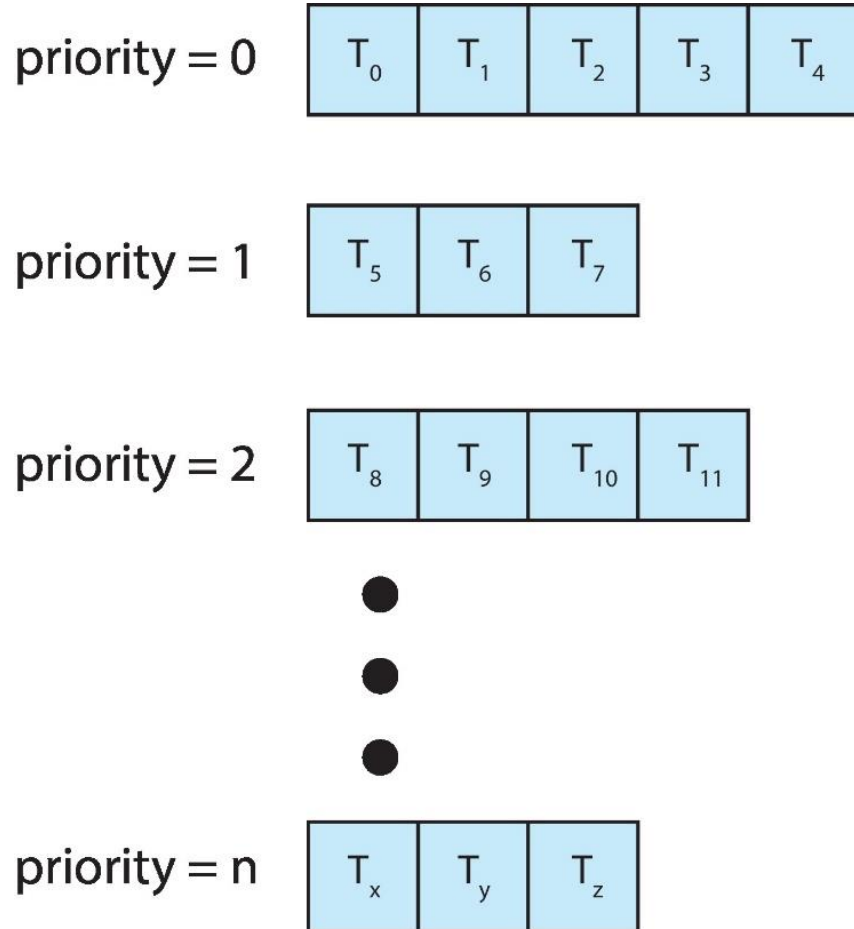

Process Type and Multilevel Queue

- Example: Prioritization based upon process type

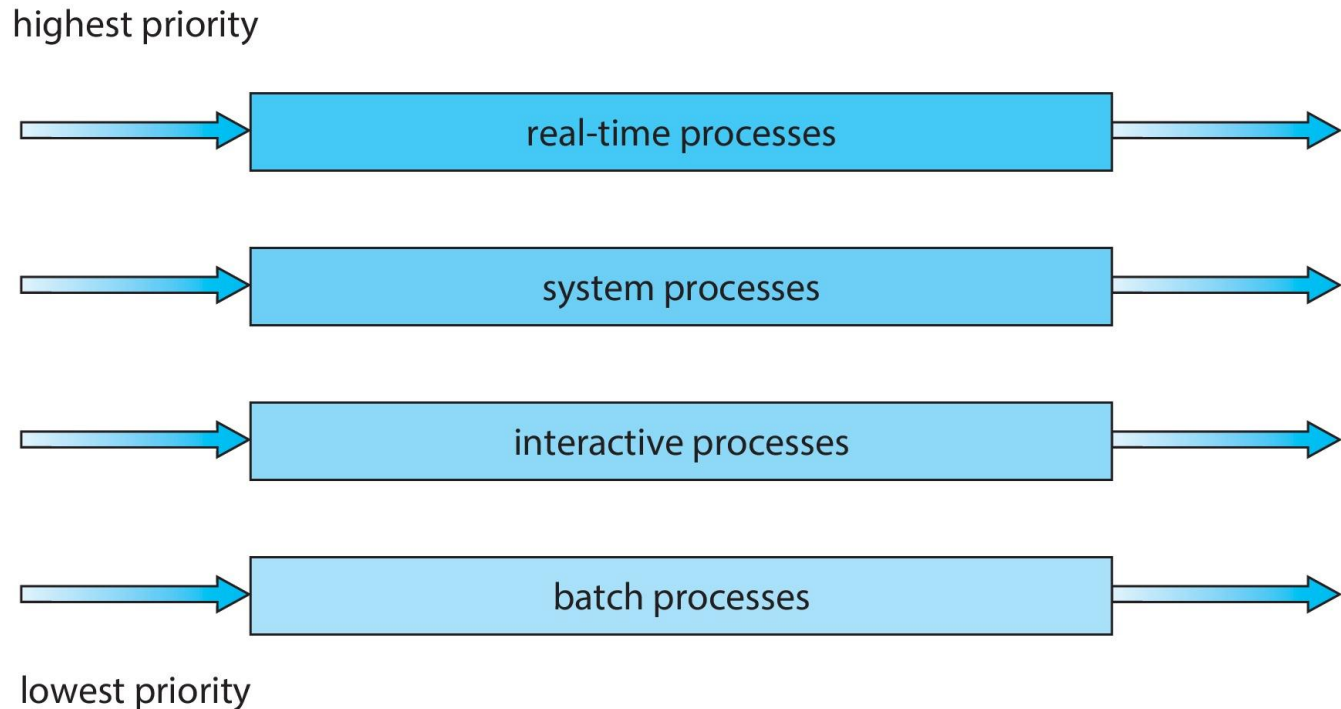

Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way
- Multilevel-feedback-queue scheduler defined by the following parameters:
 - number of queues
 - scheduling algorithms for each queue
 - method used to determine when to upgrade a process
 - method used to determine when to demote a process
 - method used to determine which queue a process will enter when that process needs service


Example of Multilevel Feedback Queue

- Three queues:

- Q_0 - RR with time quantum 8 millisecond.
- Q_1 - RR time quantum 16 milliseconds
- Q_2 - FCFS

- Scheduling

- A new job enters queue Q_0 which is served FCFS
 - When it gains CPU, job receives 8 milliseconds
 - If it does not finish in 8 milliseconds, job is moved to queue Q_1
- At Q_1 job is again served FCFS and receives 16 additional milliseconds
 - If it still does not complete, it is preempted and moved to queue Q_2

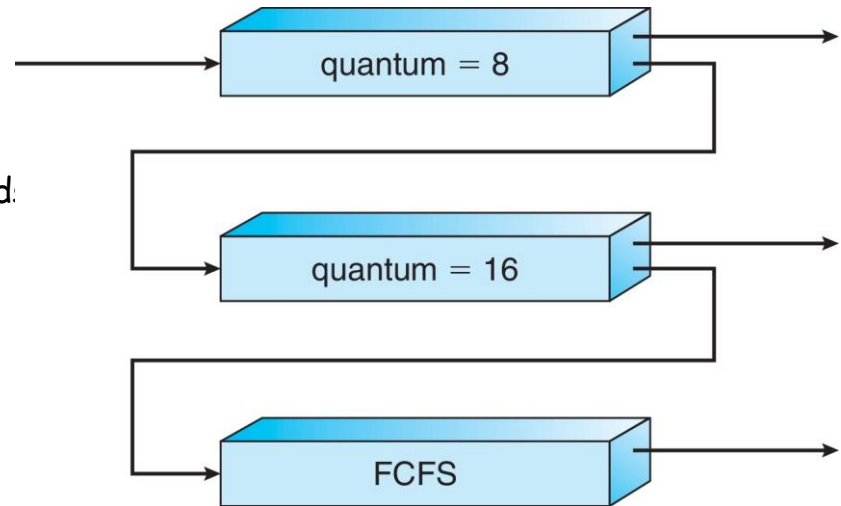

Questions?

- Various CPU scheduling algorithms
 - Computing scheduling criteria
- Determine CPU burst time
- Different types of queues